



PERFORMANCE

TEMPERATURE RANGE	-10°C / +40°C
HUMIDITY RANGE	50% / 100%
CAPABILITIES	1 trolley 600x800mm or 2 trolleys 600x400mm

CHECK



FEATURES

- White plastic-coated sheet metal casing
- High energy saving
- Latest generation electronic fans
- Low energy consumption fans

- Proportional electronic control humidifier
- Environmentally friendly refrigerant gas R290
- 7" high definition full touch display, easy to use
- Bi-directional 4.0 connectivity
- USB port for recipe download, firmware upgrade, recipe upload/download, HACCP download.
- Ethernet connection
- Memorable recipes
- Multilingual It-en-fr-es-de-dk-cz-fi

OPTIONAL

Cell without insulated floor

Ozone sanitization

60Hz version

DIMENSIONS

Width	930 mm [36.61 in]
Depth	1269 mm [49.96 in]
Height	2520 mm [99.21 in]
Door light width 1	770 mm [30.31 in]
Door light height 1	1770 mm [69.69 in]
Door depth open 90°	1973 mm [77.68 in]
Internal depth	904 mm [35.59 in]
Packaging width	1010 mm [39.76 in]
Packing depth	1309 mm [51.54 in]
Packaging height	2660 mm [104.72 in]
Packing volume	1.19 m ³ [315.73 glus]


TECHNICAL DATA

Temperature range	-10°C / +40°C
Humidity range	50% / 100%
Insulation thickness	60 mm [2.36in]
Number of rooms	1
Door type	Blind
Number of doors	1
Bottom insulation thickness	60 mm [2.36in]
Condensation type	Air
Plant type	Motor on board
Plant type	Ventilated
Compressor type	Hermetic
Refrigerant gas	R290
GWP refrigerant gas	3
Refrigerant gas quantity g	100 g [6.25oz]
Water inlet connection	3/4 NTPf
Sound power	< 70 dbA
Defrost type	Electric
Defrost water evaporation	Automatic
Interior lighting	Not present
Outdoor lighting	Not present
Climatic class	5


SUPPLY

Power supply	220-240 V ~ 50 Hz
FLI - Max cold power	3120 W
FLA - Max cold absorption	13 A
Power cable	3G 1,5 mm ²
Power plug	CE-Schuko


DIMENSIONS

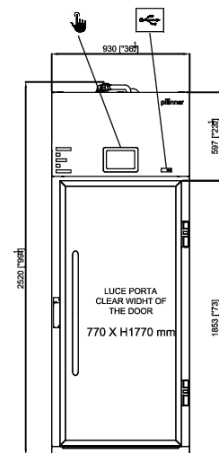



H20

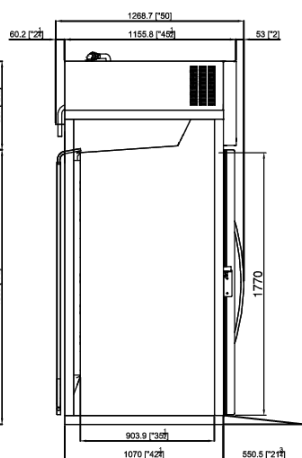


planner C (S=short)

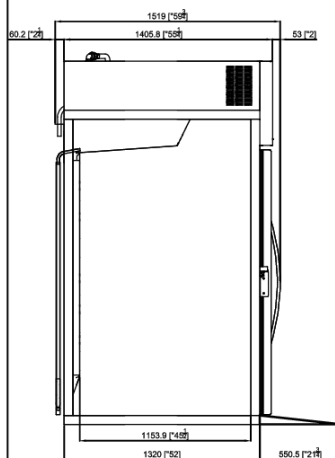


planner C (D=deep)

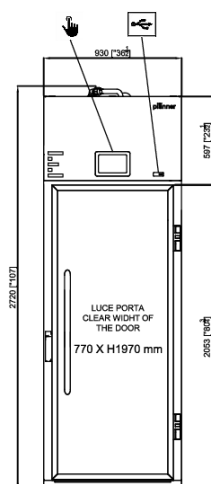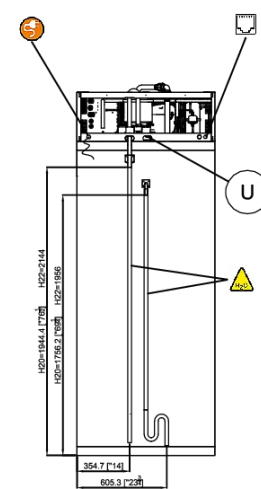


H22

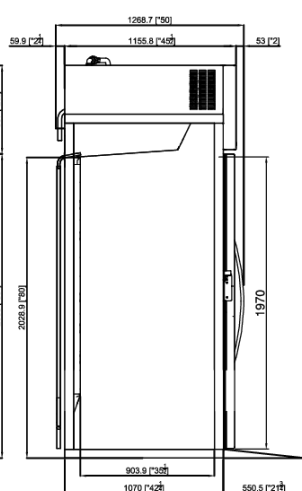


planner C (S=short)

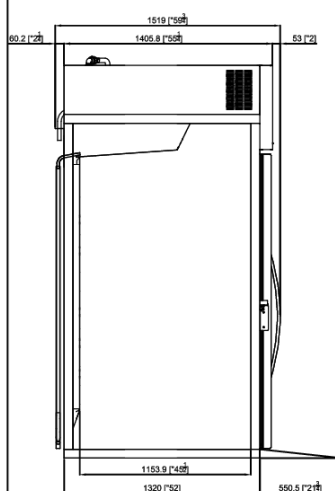


planner C (D=deep)

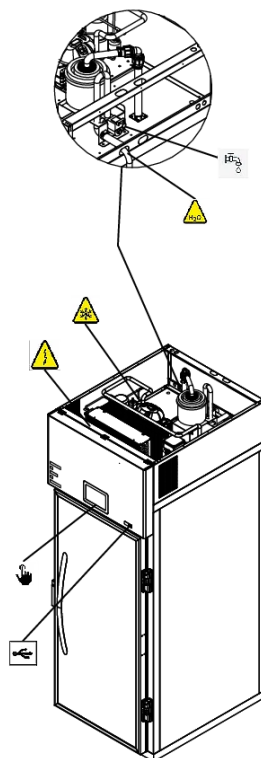

H20 - H22

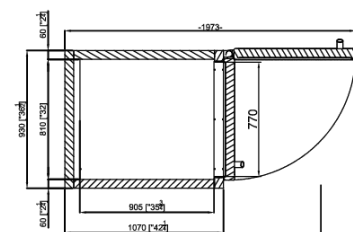

planner C (S=short)



planner C (D=deep)

Pannello comandi touch
Touch control

Porta USB
USB port

Cavo ethernet
Ethernet cable

Tubo carico acqua
Loading pipe

Cavo alimentazione elettrica
Power supply cable

Impianto frigo
Refrigeration system

Scatola elettrica
Electric box

Tubo scarico acqua
Drain pipe