



PERFORMANCE

TEMPERATURE RANGE	-10°C / +38°C
HUMIDITY RANGE	50% / 100%
CAPABILITIES	25 trays 600x400mm
PASTRY PANS	25
STEP PASTRY GUIDES	50 mm

CHECK



FEATURES

- High energy saving
- Latest generation electronic fans
- Low energy consumption fans
- Proportional electronic control humidifier
- Environmentally friendly refrigerant gas R290
- 7" high definition full touch display, easy to use
- Bi-directional 4.0 connectivity
- USB port for recipe download, firmware upgrade, recipe upload/download, HACCP download.
- Ethernet connection
- Memorable recipes
- Multilingual It-en-fr-es-de-dk-cz-fi

OPTIONAL

- Ozone sanitization
- 60Hz version

DIMENSIONS

Width	810 mm [31.89 in]
Depth	1062 mm [41.81 in]
Height	2191-2241 mm [NaN in]
Weight	217 kg [478.49 lb]
Foot height	100-150 mm [3.94-5.91 in]
Wheel height	155 mm [6.1 in]
Door light width 1	670 mm [26.38 in]
Door light height 1	1540 mm [60.63 in]
Door depth open 90°	1805 mm [71.06 in]
Internal depth	804 mm [31.65 in]
Packaging width	860 mm [33.86 in]
Packing depth	1160 mm [45.67 in]
Packaging height	2300 mm [90.55 in]
Packing weight	232 kg [511.56 lb]
Packing volume	2.29 m ³ [606.13 glus]

TECHNICAL DATA

Temperature range	-10°C / +38°C
Humidity range	50% / 100%
Insulation thickness	70 mm [2.76in]
Number of rooms	1
Door type	Blind
Number of doors	1
Condensation type	Air
Plant type	Motor on board
Plant type	Ventilated
Compressor type	Hermetic
Refrigerant gas	R290
GWP refrigerant gas	3
Refrigerant gas quantity g	135 g [8.44oz]
Water inlet connection	3/4 NTPf
Sound power	< 70 dbA
Defrost type	Hot Gas
Defrost water evaporation	Automatic
Interior lighting	Not present
Outdoor lighting	Led
Climatic class	5

CAPABILITIES

GN grids	[]
EN Grids	[]

CAPABILITIES


EN pans	25
Step guides EN	50 mm
IC grids	[]

SUPPLY


Power supply	220-240 V ~ 50 Hz
FLI - Max cold power	2200 W
FLA - Max cold absorption	10 A
Power cable	3G 1,5 mm ²
Power plug	CE-Schuko

DIMENSIONS



Vista Frontale
Frontal side

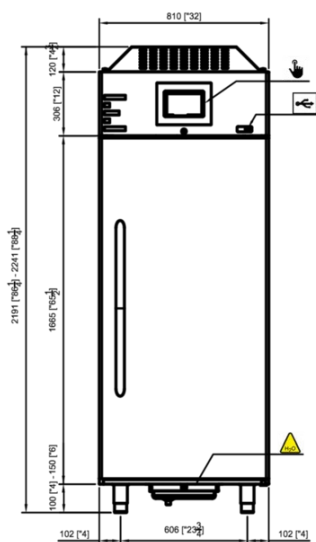

Vista Laterale
Lateral side

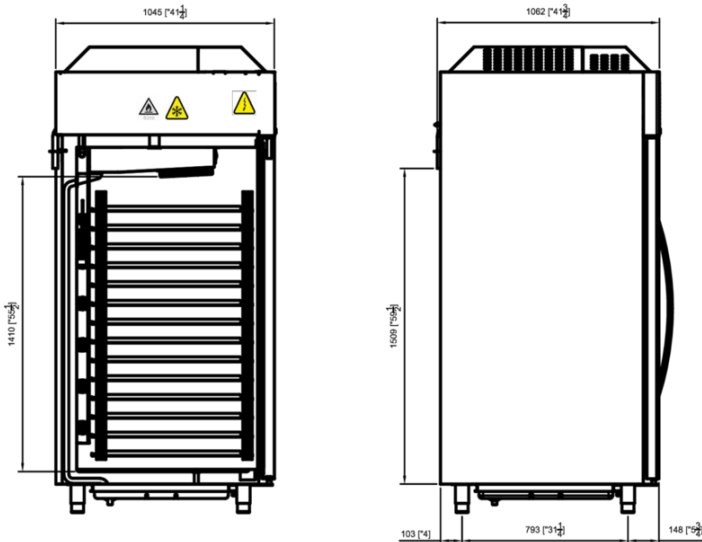

Vista Superiore
Top View

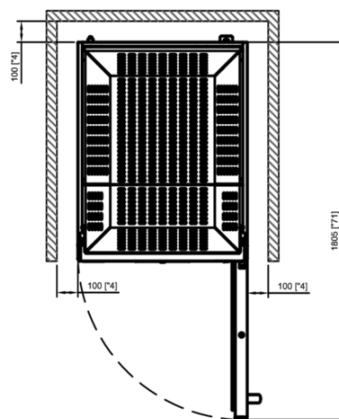

Pannello comandi touch
Touch control

Porta USB
USB port

Cavo ethernet
Ethernet cable

Tubo carico acqua
Loading pipe

Cavo alimentazione elettrica
Power supply cable

Impianto frigo
Refrigeration system

Scatola elettrica
Electric box

Tubo scarico acqua
Drain pipe