



PERFORMANCE

TEMPERATURE RANGE	-10°C / +38°C
HUMIDITY RANGE	50% / 100%
CAPABILITIES	26 baking tins 600x400mm
PASTRY PANS	26
STEP PASTRY GUIDES	50 mm

CHECK



FEATURES

- High energy saving
- Latest generation electronic fans
- Low energy consumption fans
- Proportional electronic control humidifier
- Environmentally friendly refrigerant gas R290
- 7" high definition full touch display, easy to use
- Bi-directional 4.0 connectivity
- USB port for recipe download, firmware upgrade, recipe upload/download, HACCP download.
- Ethernet connection
- Memorable recipes
- Multilingual It-en-fr-es-de-dk-cz-fi

OPTIONAL

- Ozone sanitization
- 60Hz version

DIMENSIONS

Width	730 mm [28.74 in]
Depth	879 mm [34.61 in]
Height	2170-2225 mm [NaN in]
Weight	148 kg [326.34 lb]
Foot height	130-185 mm [5.12-7.28 in]
Wheel height	155 mm [6.1 in]
Door light width 1	590 mm [23.23 in]
Door light height 1	1470 mm [57.87 in]
Door depth open 90°	1490 mm [58.66 in]
Internal depth	675 mm [26.57 in]
Packaging width	810 mm [31.89 in]
Packing depth	925 mm [36.42 in]
Packaging height	2275 mm [89.57 in]
Packing weight	169 kg [372.65 lb]
Packing volume	1.7 m ³ [450.29 glus]

TECHNICAL DATA

Temperature range	-10°C / +38°C
Humidity range	50% / 100%
Insulation thickness	70 mm [2.76in]
Number of rooms	1
Door type	Blind
Number of doors	1
Condensation type	Air
Plant type	Motor on board
Plant type	Ventilated
Compressor type	Hermetic
Refrigerant gas	R290
GWP refrigerant gas	3
Refrigerant gas quantity g	120 g [7.50oz]
Water inlet connection	3/4 NTPf
Sound power	< 70 dbA
Defrost type	Electric
Defrost water evaporation	Automatic
Interior lighting	Not present
Outdoor lighting	Led
Climatic class	5

CAPABILITIES

GN grids	[]
EN Grids	[]

CAPABILITIES


EN pans	26
Step guides EN	50 mm
IC grids	[]

SUPPLY


Power supply	220-240 V ~ 50 Hz
FLI - Max cold power	1500 W
FLA - Max cold absorption	7.5 A
Power cable	3G 1,5 mm ²
Power plug	CE-Schuko

DIMENSIONS



Vista Frontale
Frontal side

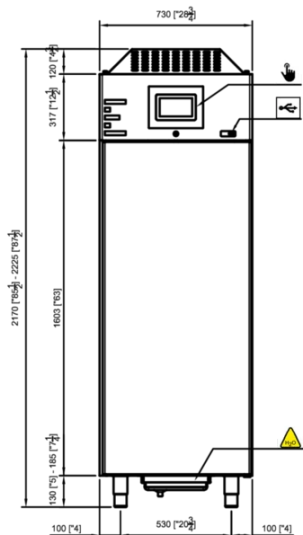

Vista Laterale
Lateral side

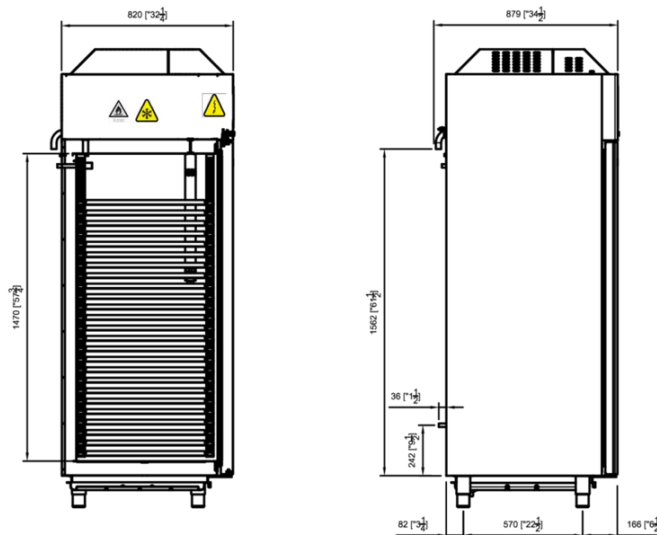

Vista Superiore
Top View

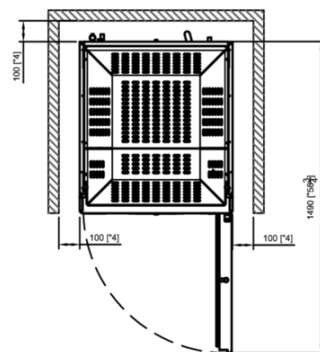

 Pannello comandi touch
Touch control

 Porta USB
USB port

 Cavo ethernet
Ethernet cable

 Tubo carico acqua
Loading pipe

 Cavo alimentazione elettrica
Power supply cable

 Impianto frigo
Refrigeration system

 Scatola elettrica
Electric box

 Tubo scarico acqua
Drain pipe