



#### PERFORMANCE

|                                 |               |
|---------------------------------|---------------|
| TEMPERATURE RANGE               | -25°C / -15°C |
| PASTRY SET-UP                   | Trays 600x400 |
| PASTRY PANS                     | 120           |
| STEP PASTRY GUIDES              | 50 mm         |
| STEP ICE CREAM GUIDES           | 140 mm        |
| ICE CREAM TRAYS 165x360x120h mm | 120           |

#### CHECK



#### FEATURES

- Ducted air flow
- Insulation thickness 80 mm
- 
- Internet ready/cloud/diagnosis and remote control
- Multi-phase leavening, programmable
- Possibility to memorize recipes

#### OPTIONAL

- Insulation thickness 100mm
- External stainless steel surfaces

### DIMENSIONS

|                     |                          |
|---------------------|--------------------------|
| Width               | 1760 mm [69.29 in]       |
| Depth               | 1140 mm [44.88 in]       |
| Height              | 2312-2342 mm [NaN in]    |
| Foot height         | 90-120 mm [3.54-4.72 in] |
| Door light width 1  | 608 mm [23.94 in]        |
| Door light height 1 | 798 mm [31.42 in]        |
| Door depth open 90° | 1736 mm [68.35 in]       |

### TECHNICAL DATA

|                           |                |
|---------------------------|----------------|
| Temperature range         | -25°C / -15°C  |
| Insulation thickness      | 80 mm [3.15in] |
| Number of rooms           | 1              |
| Door type                 | Blind          |
| Number of ports 1/2       | 4              |
| Condensation type         | Air            |
| Plant type                | Motor on board |
| Plant type                | Ventilated     |
| Compressor type           | Hermetic       |
| Refrigerant gas           | R290           |
| GWP refrigerant gas       | 3              |
| Sound power               | < 70 dbA       |
| Defrost type              | Electric       |
| Defrost water evaporation | Automatic      |

### CAPABILITIES





|                           |               |
|---------------------------|---------------|
| GN grids                  | []            |
| EN Setup                  | Trays 600x400 |
| EN Grids                  | []            |
| EN pans                   | 120           |
| Step guides EN            | 50 mm         |
| IC grids                  | []            |
| Step IC guides            | 140 mm        |
| 5Lt tanks 360x165x120h mm | 120           |

**SUPPLY**

|                      |                        |
|----------------------|------------------------|
| Power supply         | 220-240 V ~ 50 Hz      |
| FLI - Max cold power | 2100 W                 |
| Power cable          | 3G 1,5 mm <sup>2</sup> |
| Power plug           | CE-Schuko              |

DRAFT

## DIMENSIONS

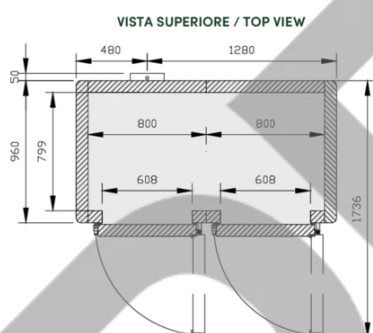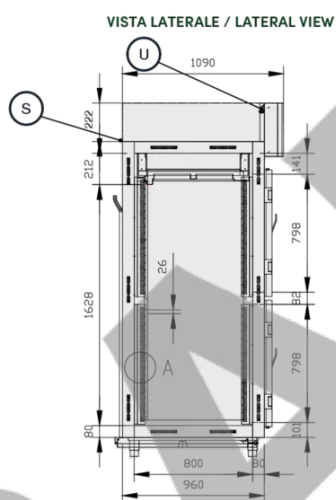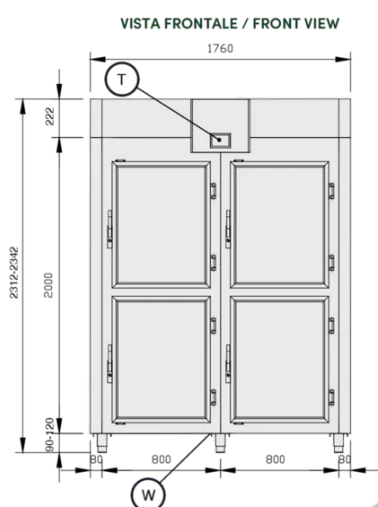

-  Cavo alimentazione elettrica  
Electrical cable supply
-  Scarico condensa evaporatore  
Water evap. discharge
-  Connessione USB  
USB Connection 
-  Interfaccia Touch  
Touch screen