



PERFORMANCE

TEMPERATURE RANGE	-2°C / +8°C
PASTRY SET-UP	Trays 600x400
PASTRY PANS	120
STEP PASTRY GUIDES	50 mm
STEP ICE CREAM GUIDES	140 mm
ICE CREAM TRAYS 165x360x120h mm	120

CHECK



FEATURES

- Ducted air flow
- Insulation thickness 80 mm
-
- Internet ready/cloud/diagnosis and remote control
- Multi-phase leavening, programmable
- Possibility to memorize recipes

OPTIONAL

- Insulation thickness 100mm
- External stainless steel surfaces

DIMENSIONS

Width	1760 mm [69.29 in]
Depth	1140 mm [44.88 in]
Height	2312-2342 mm [NaN in]
Foot height	90-120 mm [3.54-4.72 in]
Door light width 1	608 mm [23.94 in]
Door light height 1	798 mm [31.42 in]
Door depth open 90°	1736 mm [68.35 in]

TECHNICAL DATA

Temperature range	-2°C / +8°C
Insulation thickness	80 mm [3.15in]
Number of rooms	1
Door type	Blind
Number of ports 1/2	4
Condensation type	Air
Plant type	Motor on board
Plant type	Ventilated
Compressor type	Hermetic
Refrigerant gas	R452A
GWP refrigerant gas	2141
Sound power	< 70 dbA
Defrost type	Electric
Defrost water evaporation	Automatic

CAPABILITIES





GN grids	[]
EN Setup	Trays 600x400
EN Grids	[]
EN pans	120
Step guides EN	50 mm
IC grids	[]
Step IC guides	140 mm
5Lt tanks 360x165x120h mm	120

SUPPLY

Power supply	220-240 V ~ 50 Hz
FLI - Max cold power	935 W
Power cable	3G 1,5 mm ²
Power plug	CE-Schuko

DRAFT

DIMENSIONS

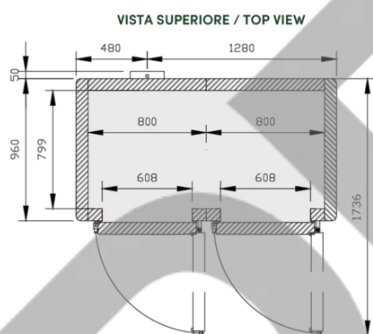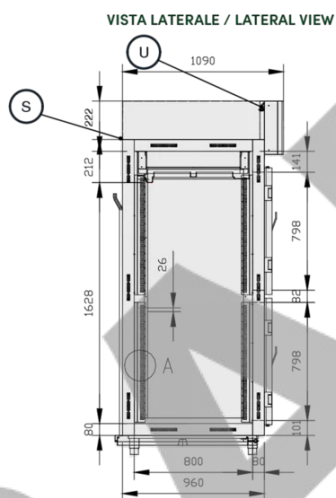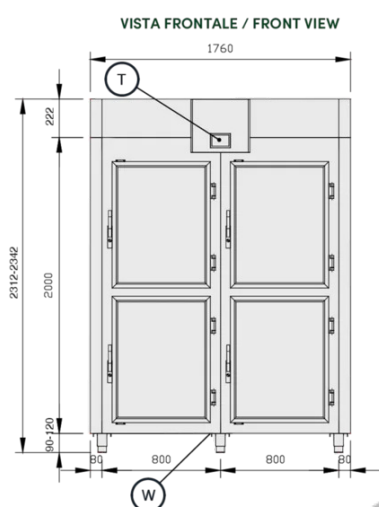

- S** Cavo alimentazione elettrica
Electrical cable supply
- W** Scarico condensa evaporatore
Water evap. discharge
- U** Connessione USB
USB Connection 
- T** Interfaccia Touch
Touch screen