

PEPPER

Range

REFRIGERANT GAS:
R452A
R290



5T

CAPACITY 5 trays GN 1/1 - 600x400
VOLTAGE 220-240 V / 1N / 50 Hz
DIMENSIONS (WDH) 820 x 800 x 890 mm
+90°C > 3°C 21 kg
+90°C > -18°C 13 kg



10T

CAPACITY 10 trays GN 1/1 - 600x400
VOLTAGE 220-240 V / 1N / 50 Hz
DIMENSIONS (WDH) 820 x 900 x 1500 mm
+90°C > 3°C 34 kg
+90°C > -18°C 25 kg



15T


CAPACITY 15 trays GN 1/1 - 600x400
VOLTAGE 220-240 V / 1N / 50 Hz
DIMENSIONS (WDH) 820 x 900 x 1950 mm
+90°C > 3°C 73 kg
+90°C > -18°C 60 kg



30T

CAPACITY 30 trays GN 1/1 - 600x400
VOLTAGE 400 V / 3N / 50 Hz
DIMENSIONS (WDH) 820 x 1320 x 1950 mm
+90°C > 3°C 76 kg
+90°C > -18°C 63 kg

DISPLAY

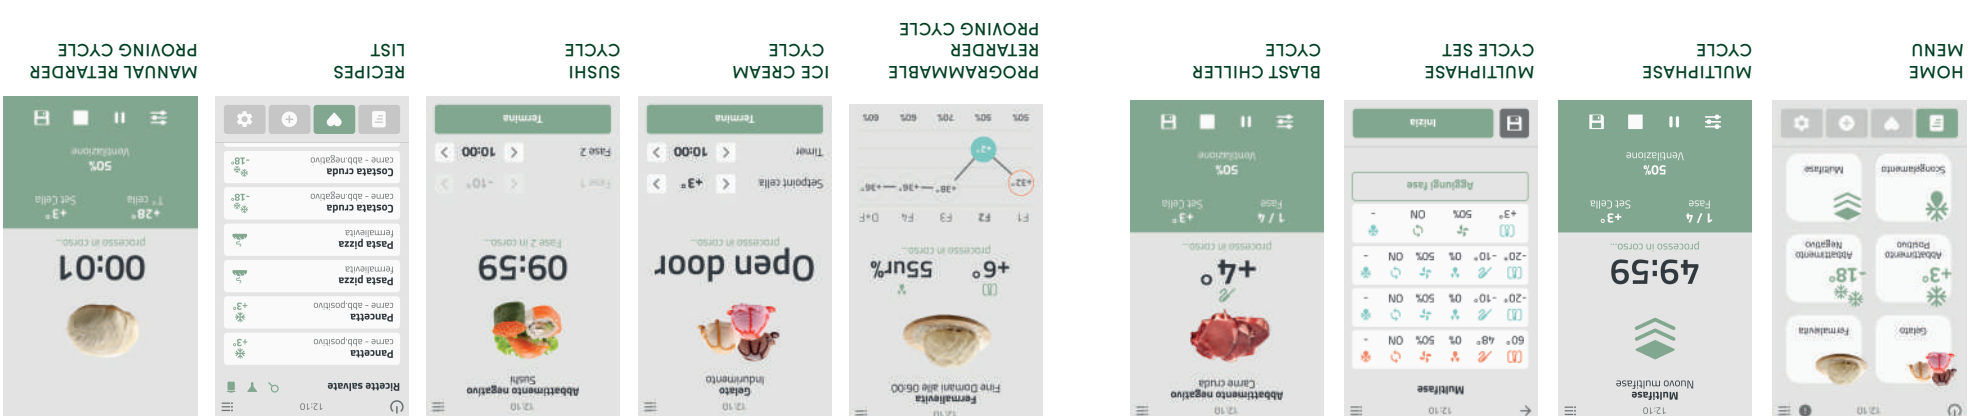

TECNOMAC

our technology, your taste



PEPPER

BLAST CHILLER




MULTIFUNCTION SOLUTION

- MULTI PHASE
- TOUCH CONTROL
- PROGRAMMED OZONE CYCLE
- WI-FI
- USB
- DFC Control



❑ CHILLING CYCLE

❑ MULTIPOINT HEATED CORE PROBE

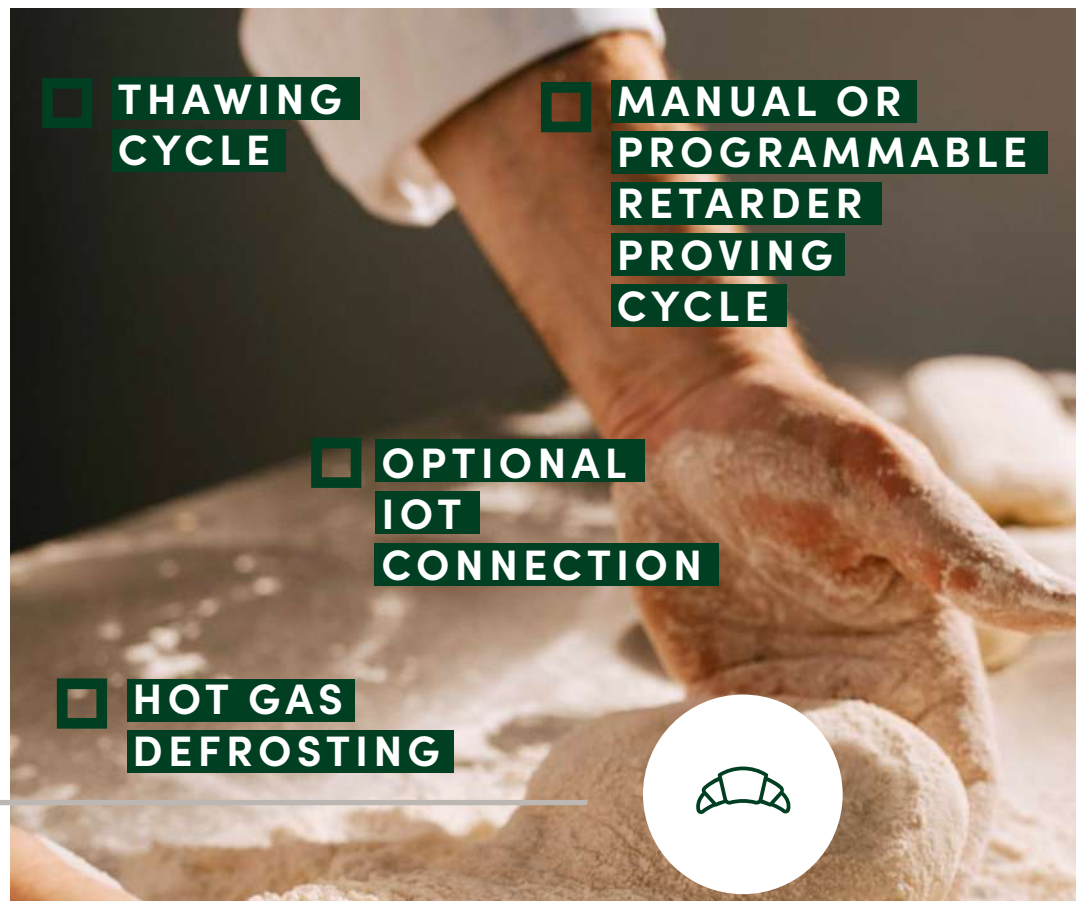


❑ THAWING CYCLE

❑ MANUAL OR PROGRAMMABLE RETARDER PROVING CYCLE

❑ OPTIONAL IOT CONNECTION

❑ HOT GAS DEFROSTING

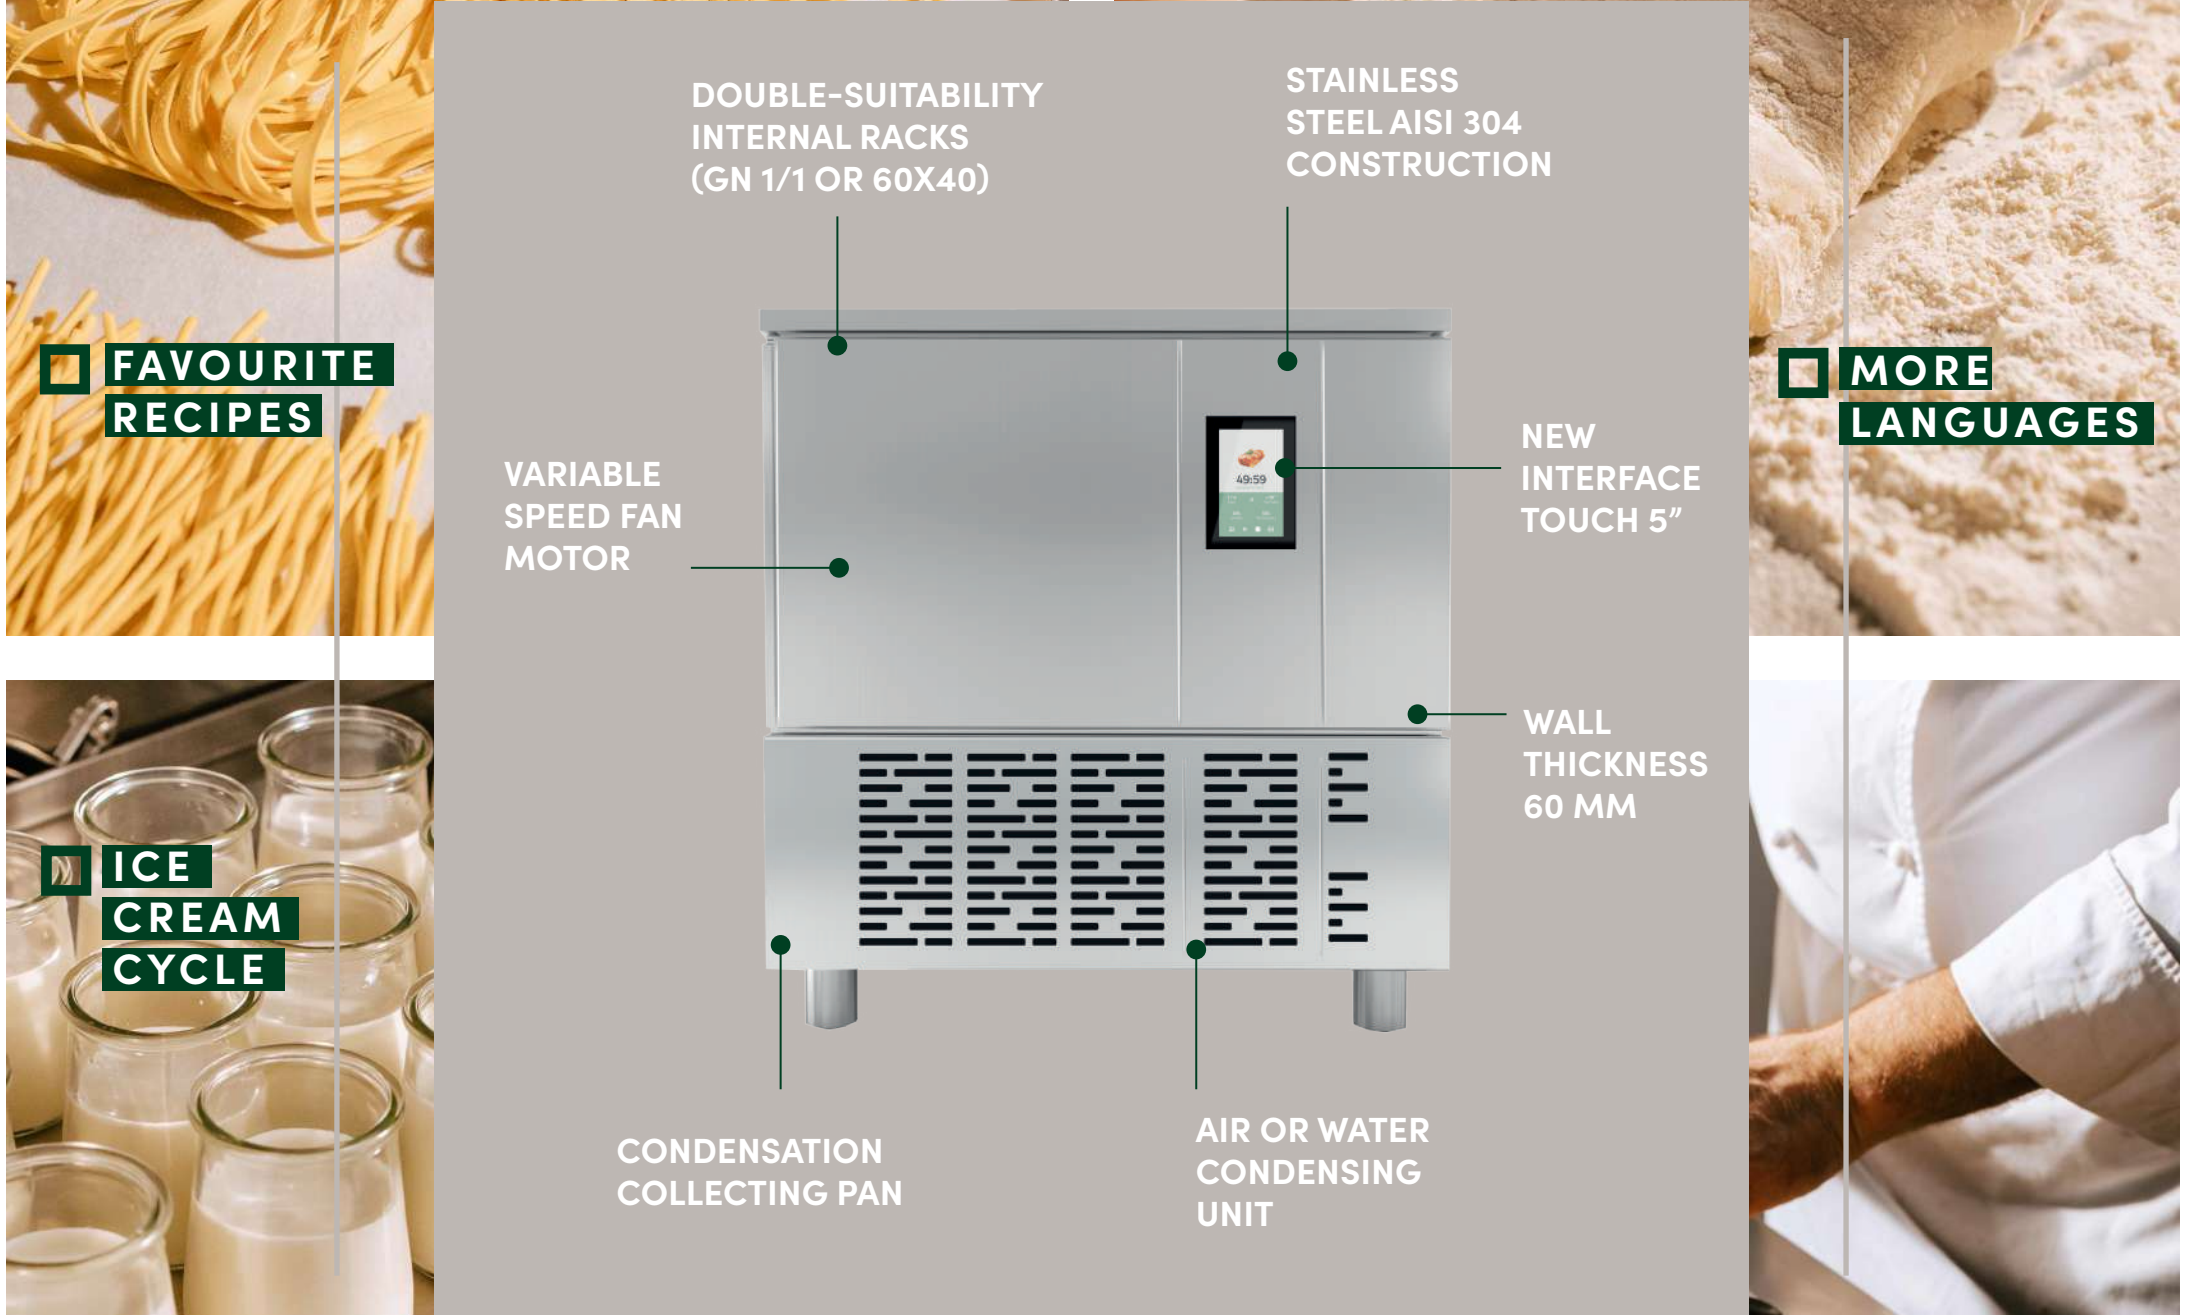


❑ FAVOURITE RECIPES

❑ MORE LANGUAGES




❑ ICE CREAM CYCLE

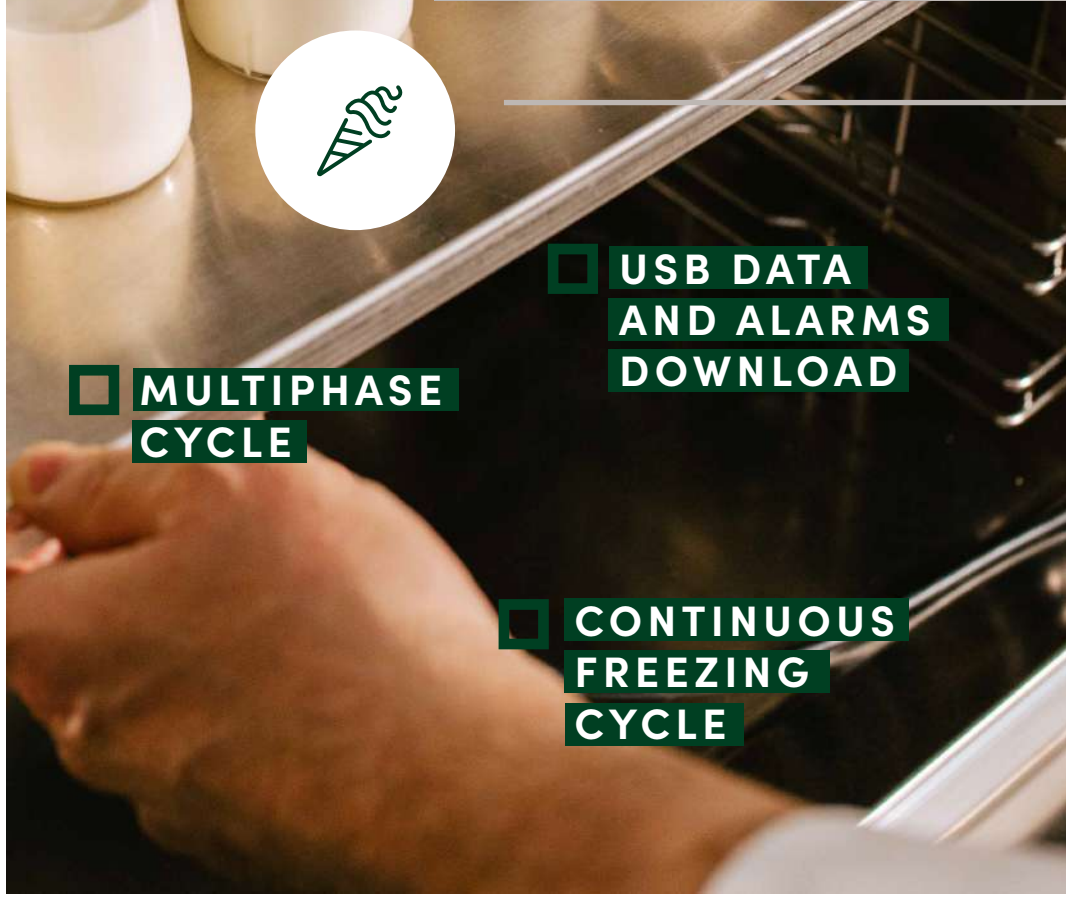

❑ MULTIPHASE CYCLE

❑ USB DATA AND ALARMS DOWNLOAD

❑ CONTINUOUS FREEZING CYCLE

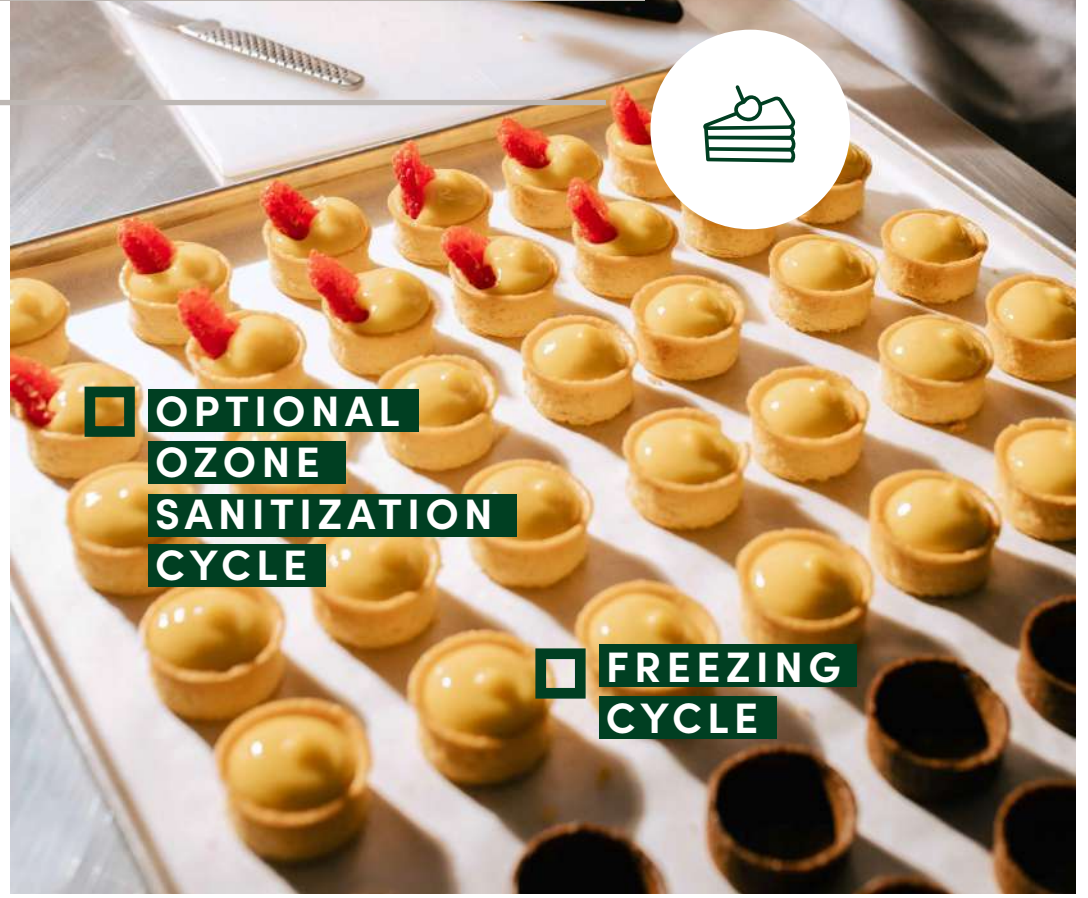

❑ OPTIONAL OZONE SANITIZATION CYCLE

❑ FREEZING CYCLE

