




PERFORMANCE

PRODUCT YIELDS +90°C/+3°C	120 kg
PRODUCT YIELDS +90°C/-18°C	80 kg
TEMPERATURE RANGE	-40°C / +5°C
CAPABILITIES	1 trolley GN 1/1 - GN 2/1 - EN1 EN2

CHECK

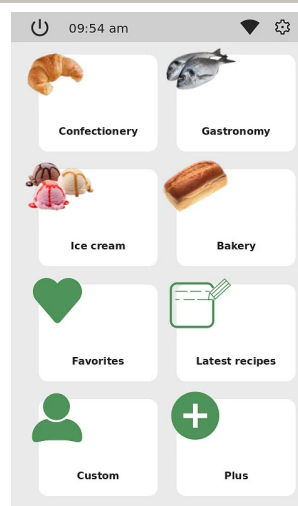

FEATURES

- Next-generation electronic fans (5 different speeds)
- High-density expanded polyurethane insulation (approximately 42 kg/m³), HCFC-free - Thickness 70 mm
- Maximum flexibility to optimize and customize the daily work process
- Total inspectability of the room for maximum hygiene
- 4-point heated heart core included
- HACCP usb port included
- Access ramp
- Evaporator prepared for connection to remote condensing unit
- Evaporating coil in copper-aluminum, cataphoresis painted with non-toxic epoxy resin
- Condensate collection tray
- 7" high definition touch display on the door, easy to use
- USB port for cycle download, firmware upgrade, recipe upload/download etc.

OPTIONAL

- Ozone sanitization
- Hinged door on the left
- Water-covered condensing unit
- Covered and tropicalized condensing unit

Silent condensing unit

DIMENSIONS

Width	890 mm [35.04 in]
Depth	1392 mm [54.8 in]
Height	2201 mm [86.65 in]
Weight	490 kg [1080.45 lb]
Door light width 1	750 mm [29.53 in]
Door light height 1	1900 mm [74.8 in]
Door depth open 90°	2144 mm [84.41 in]
Internal depth	844 mm [33.23 in]
Packaging width	960 mm [37.8 in]
Packing depth	1530 mm [60.24 in]
Packaging height	2540 mm [100 in]
Packing weight	580 kg [1278.9 lb]
Packing volume	3.73 m ³ [985.55 glus]

TECHNICAL DATA

Temperature range	-40°C / +5°C
Insulation thickness	70 mm [2.76in]
Number of rooms	1
Door type	Blind
Number of doors	1
Bottom insulation thickness	60 mm [2.36in]
Plant type	Remote motor
Compressor type	Hermetic
Refrigerant gas	R452a
GWP refrigerant gas	
Water outlet connection	DN20 NTPf
Cooling power EN12900 lbp	2804 W [9561.64btu/h]
Sound power	<70 dbA
Expansion valve type	Electronics
Defrost type	Open door
Defrost water evaporation	Exhaust pipe
Interior lighting	Not present
Outdoor lighting	Not present
Climatic class	5
FLI - Cold power max remote unit	7390 W [25199.9W]
FLA - Cold absorption max remote unit	14.4 A

SUPPLY

Power supply	380-415 V 3N~ 50 Hz
FLI - Max cold power	2700 W
FLA - Max cold absorption	4 A


SUPPLY

Max hot power	500 W
Max hot absorption	2.2 A
Power cable	5G 2,5 mm ²
Power plug	Plug not provided
FLI - Cold power max remote unit	7390 W
FLA - Cold absorption max remote unit	14.4 A

PERFORMANCE

Blast chilling capacity (+65°C -> +10°C) EN ISO22042	120 kg [264.6lb]
Freezing capacity (+65°C -> -18°C) EN ISO22042	80 kg [176.4lb]
Energy consumption per blast cycle (+65°C -> +10°C) UNI EN ISO22042	0.08 kW/kg
Energy consumption per freezing cycle (+65°C -> +10°C) UNI EN ISO22042	0.216 kW/kg
Blast-down time (+65°C -> +10°C) UNI EN ISO22042	120 min
Freezing time (+65°C -> -18°C) UNI EN ISO22042	270 min

DIMENSIONS

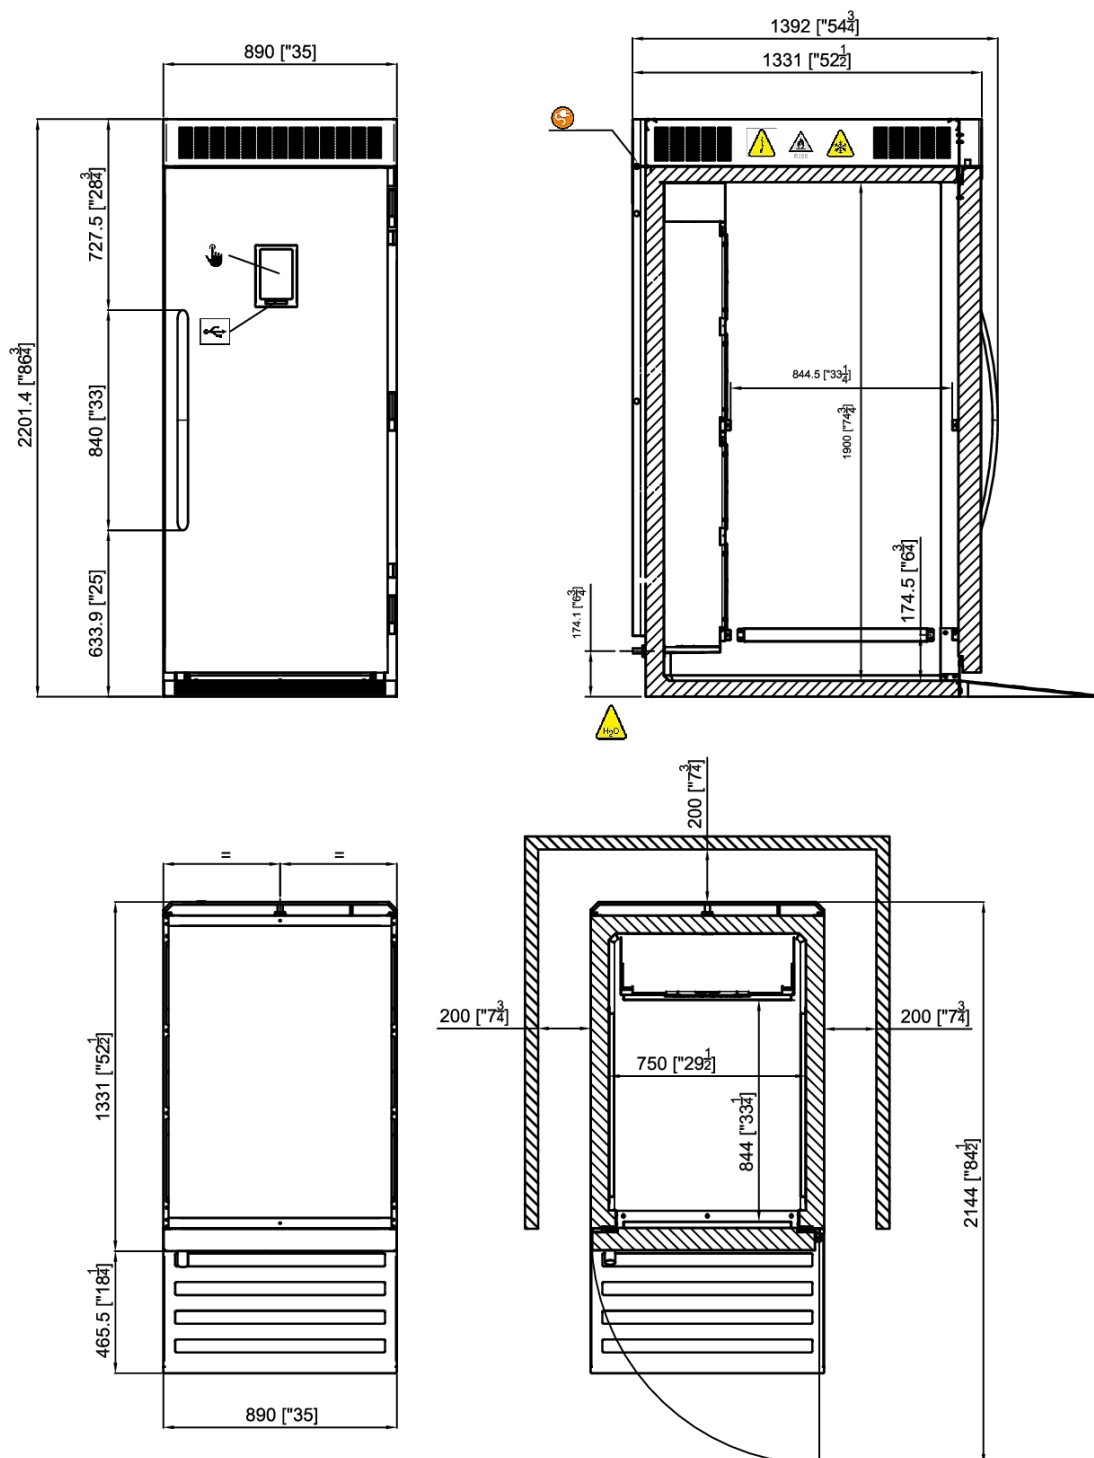

Pannello comandi touch
Touch control

Porta USB
USB port

Cavo ethernet
Ethernet cable


Tubo carico acqua
Loading pipe

Cavo alimentazione elettrica
Power supply cable




Impianto frigo
Refrigeration system

Scatola elettrica
Electric box

Tubo scarico acqua
Drain pipe

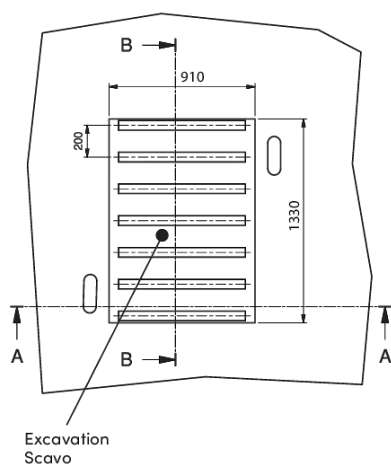

Solution for 24h/day functioning
Soluzione per funzionamento 24h/giorno

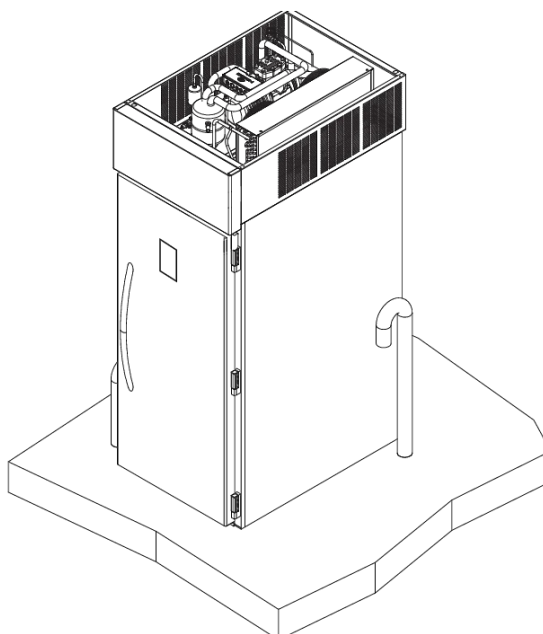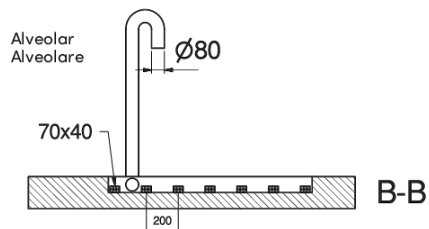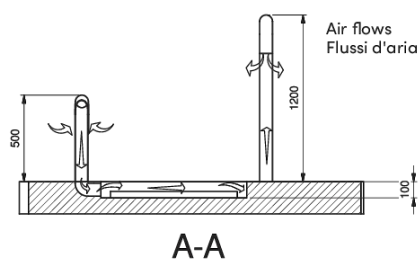

ⓘ Opere murarie e camini a cura del cliente.
Masonry work and chimneys at customer's charge.