




PERFORMANCE

TEMPERATURE RANGE **-6 / +40 °C**

CAPABILITIES **9 positions step 64mm for each door**

CHECK



FEATURES

- 5" capacitive full touch display
- Multi-stage, programmable proving

STANDARD EQUIPMENT

With a countertop with a raised edge
5 pairs of 'L' rails for each door

OPTIONAL EQUIPMENT

IOT cloud connection
Swivel casters (2 with brakes)
Lockable doors
Two drawers per compartment
Three drawers per compartment
Special voltages on request


DIMENSIONS	
Width	1460 mm [57.48 in]
Depth	800 mm [31.5 in]
Height	1000 mm [39.37 in]
Weight	108 kg [238.14 lb]
Foot height	150 mm [5.91 in]
Door light width 1	360 mm [14.17 in]
Door light height 1	543 mm [21.38 in]
Door depth open 90°	1250 mm [49.21 in]
Inner depth	553 mm [21.77 in]
Packaging width	1560 mm [61.42 in]
Packing depth	900 mm [35.43 in]
Packaging height	1100 mm [43.31 in]
Packing weight	151 kg [332.95 lb]
Packing volume	1.54 m³ [407.98 glus]

TECHNICAL DATA	
Temperature range	-6 / +40 °C
Insulation thickness	60 mm [2.36in]
Number of rooms	2
Door type	Blind
Number of doors	2
Condensation type	Air
Plant type	Motor on board
Plant type	Ventilated
Compressor type	Hermetic
Refrigerant gas	R452a
GWP refrigerant gas	2141
Defrost type	Electric
Defrost water evaporation	Automatic
Interior lighting	Not present
Outdoor lighting	Not present
Climate class	5

SECONDARY ELECTRICAL DATA	
Power plug	CE-Schuko

ELECTRICAL POWER SUPPLY VARIANTS		
	FLI - Full - Load Power	FLA - Full - Load Amperage
220-240 V ~ 50 Hz	627 W	4.45 A
208-230 V ~ 60 Hz	752 W	5 A

DIMENSIONS

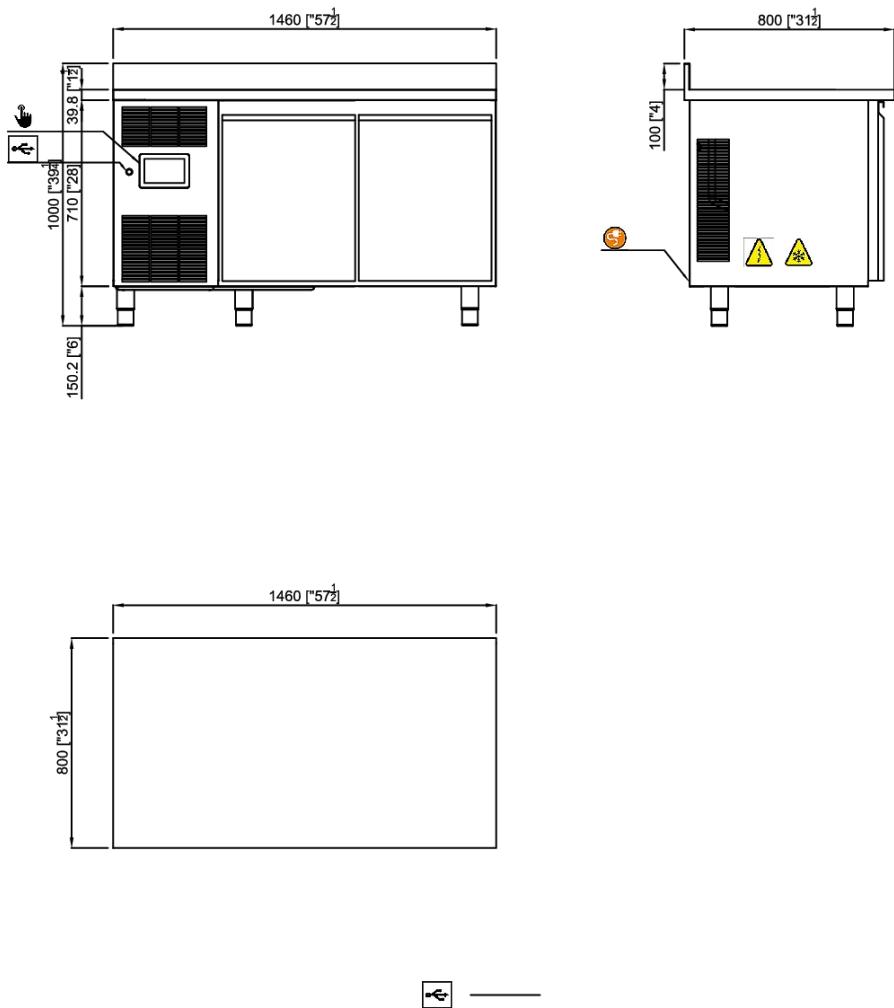

The manufacturer reserves the right to change models and specifications without prior notice.