




PERFORMANCE

TEMPERATURE RANGE **-6 / +40 °C**

CAPABILITIES **9 positions step 64mm for each door**

CHECK



FEATURES

- 5" capacitive full touch display
- Multi-stage, programmable proving

STANDARD EQUIPMENT

With a countertop with a raised edge
5 pairs of 'L' rails for each door

OPTIONAL EQUIPMENT

IOT cloud connection
Swivel casters (2 with brakes)
Lockable doors
Two drawers per compartment
Three drawers per compartment
Special voltages on request


DIMENSIONS		
Width		1980 mm [77.95 in]
Depth		800 mm [31.5 in]
Height		1000 mm [39.37 in]
Weight		173 kg [381.47 lb]
Foot height		150 mm [5.91 in]
Door light width 1		360 mm [14.17 in]
Door light height 1		543 mm [21.38 in]
Door depth open 90°		1250 mm [49.21 in]
Inner depth		553 mm [21.77 in]
Packaging width		2080 mm [81.89 in]
Packing depth		900 mm [35.43 in]
Packaging height		1100 mm [43.31 in]
Packing weight		186 kg [410.13 lb]
Packing volume		2.05 m³ [543.98 glus]

TECHNICAL DATA		
Temperature range		-6 / +40 °C
Insulation thickness		60 mm [2.36in]
Number of rooms		3
Door type		Blind
Number of doors		3
Condensation type		Air
Plant type		Motor on board
Plant type		Ventilated
Compressor type		Hermetic
Refrigerant gas		R452a
GWP refrigerant gas		2141
Defrost type		Electric
Defrost water evaporation		Automatic
Interior lighting		Not present
Outdoor lighting		Not present
Climate class		5

SECONDARY ELECTRICAL DATA		
Power plug		CE-Schuko

ELECTRICAL POWER SUPPLY VARIANTS		
	FLI - Full - Load Power	FLA - Full - Load Amperage
220-240 V ~ 50 Hz	760 W	4.8 A
208-230 V ~ 60 Hz	912 W	6 A

DIMENSIONS

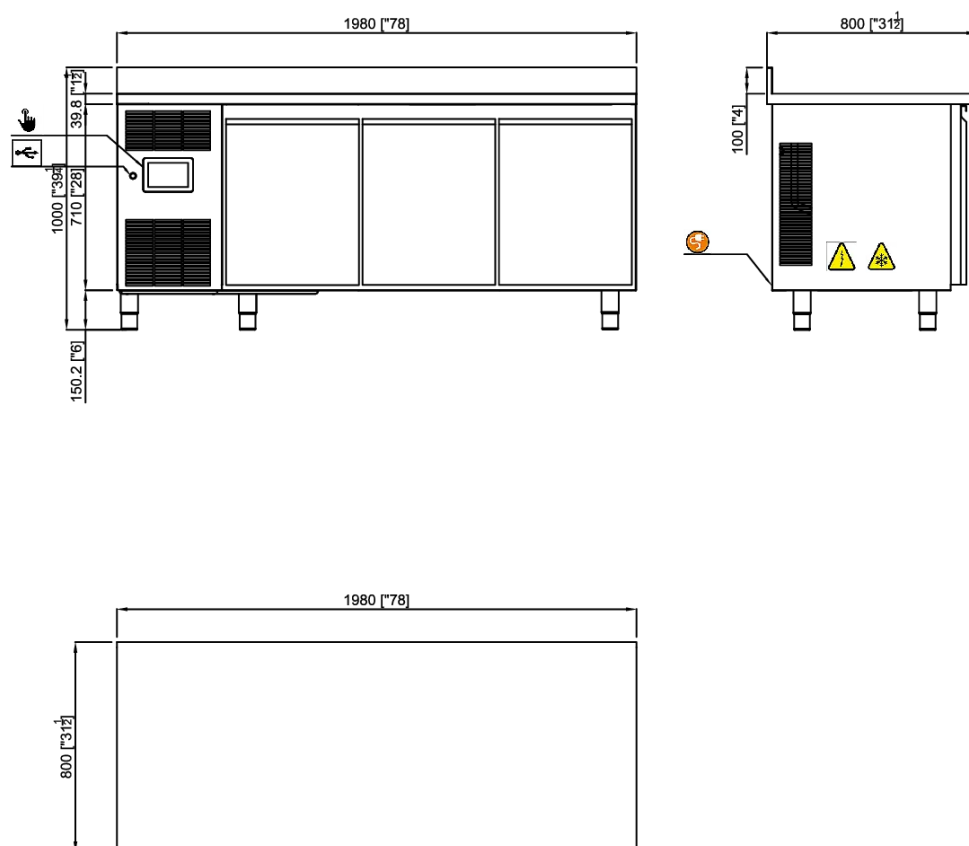

Pannello comandi touch
Touch control



Porta USB
USB port



Cavo alimentazione elettrica
Power supply cable



Impianto frigo
Refrigeration system



Scatola elettrica
Electric box