




PERFORMANCE

TEMPERATURE RANGE -6 / +40 °C

CAPABILITIES 9 positions step 64mm for each door

CHECK



FEATURES

- 5" capacitive full touch display
- Multi-stage, programmable proving

STANDARD EQUIPMENT

With a countertop with a raised edge
5 pairs of 'L' rails for each door

OPTIONAL EQUIPMENT

IOT cloud connection
Swivel casters (2 with brakes)
Lockable doors
Two drawers per compartment
Three drawers per compartment
Special voltages on request

DIMENSIONS

Width	2500 mm [98.43 in]
Depth	800 mm [31.5 in]
Height	1000 mm [39.37 in]
Weight	200 kg [441 lb]
Foot height	150 mm [5.91 in]
Door light width 1	360 mm [14.17 in]
Door light height 1	543 mm [21.38 in]
Door depth open 90°	1250 mm [49.21 in]
Inner depth	553 mm [21.77 in]
Packaging width	2600 mm [102.36 in]
Packing depth	900 mm [35.43 in]
Packaging height	1100 mm [43.31 in]
Packing weight	265 kg [584.33 lb]
Packing volume	2.57 m ³ [679.97 glus]


TECHNICAL DATA

Temperature range	-6 / +40 °C
Insulation thickness	60 mm [2.36in]
Number of rooms	4
Door type	Blind
Number of doors	4
Condensation type	Air
Plant type	Motor on board
Plant type	Ventilated
Compressor type	Hermetic
Refrigerant gas	R452a
GWP refrigerant gas	2141
Defrost type	Electric
Defrost water evaporation	Automatic
Interior lighting	Not present
Outdoor lighting	Not present
Climate class	5

SECONDARY ELECTRICAL DATA

Power plug	CE-Schuko
------------	-----------

DIMENSIONS

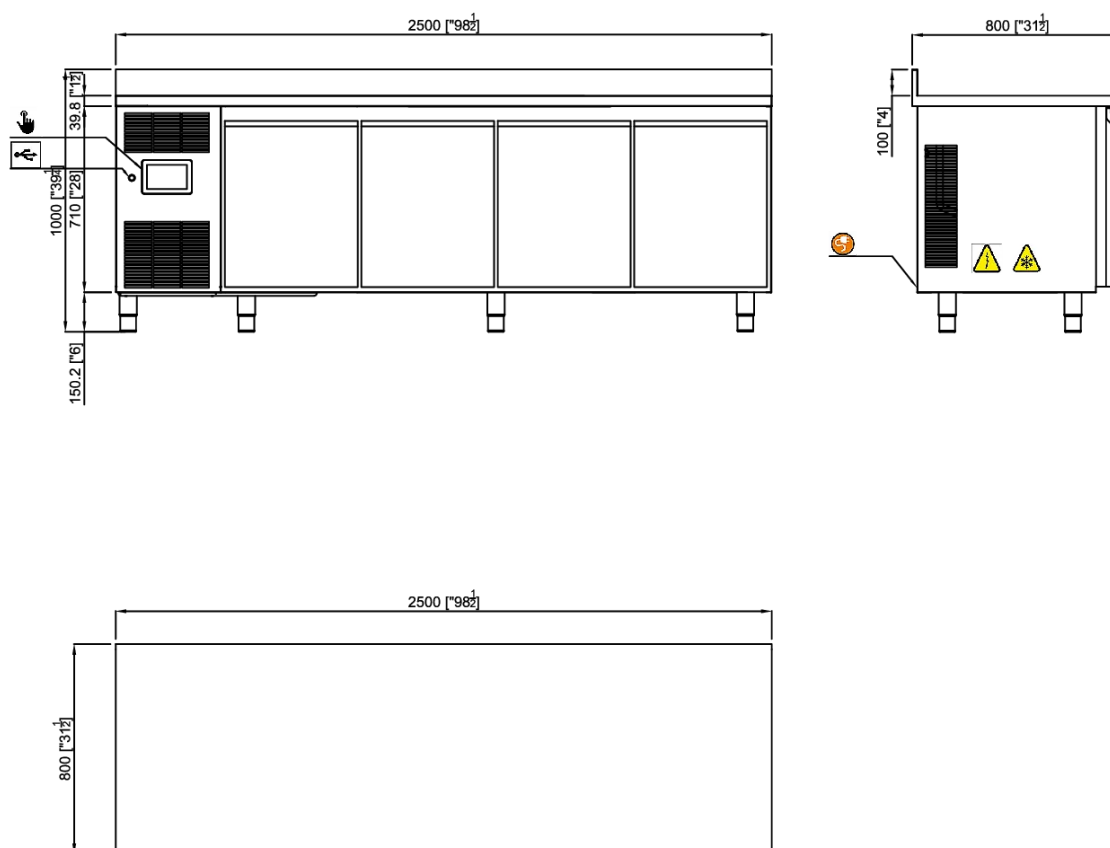

 Pannello comandi touch
Touch control

 Porta USB
USB port

 Cavo alimentazione elettrica
Power supply cable

 Impianto frigo
Refrigeration system

 Scatola elettrica
Electric box