




PERFORMANCE

TEMPERATURE RANGE **-6 / +40 °C**

CAPABILITIES **9 positions step 64mm for each door**

CHECK



FEATURES

- 5" capacitive full touch display
- Multi-stage, programmable proving

STANDARD EQUIPMENT

With a countertop

5 pairs of 'L' rails for each door

OPTIONAL EQUIPMENT

- IOT cloud connection
- Swivel casters (2 with brakes)
- Lockable doors
- Two drawers per compartment
- Three drawers per compartment
- Special voltages on request


DIMENSIONS		
Width		2500 mm [98.43 in]
Depth		800 mm [31.5 in]
Height		900 mm [35.43 in]
Weight		200 kg [441 lb]
Foot height		150 mm [5.91 in]
Door light width 1		360 mm [14.17 in]
Door light height 1		543 mm [21.38 in]
Door depth open 90°		1250 mm [49.21 in]
Inner depth		553 mm [21.77 in]
Packaging width		2600 mm [102.36 in]
Packing depth		900 mm [35.43 in]
Packaging height		1100 mm [43.31 in]
Packing weight		265 kg [584.33 lb]
Packing volume		2.57 m³ [679.97 glus]

TECHNICAL DATA		
Temperature range		-6 / +40 °C
Insulation thickness		60 mm [2.36in]
Number of rooms		4
Door type		Blind
Number of doors		4
Condensation type		Air
Plant type		Motor on board
Plant type		Ventilated
Compressor type		Hermetic
Refrigerant gas		R452a
GWP refrigerant gas		2141
Defrost type		Electric
Defrost water evaporation		Automatic
Interior lighting		Not present
Outdoor lighting		Not present
Climate class		5

SECONDARY ELECTRICAL DATA		
Power plug		CE-Schuko

ELECTRICAL POWER SUPPLY VARIANTS		
	FLI - Full - Load Power	FLA - Full - Load Amperage
220-240 V ~ 50 Hz	980 W	5.2 A
208-230 V ~ 60 Hz	1176 W	6 A

DIMENSIONS

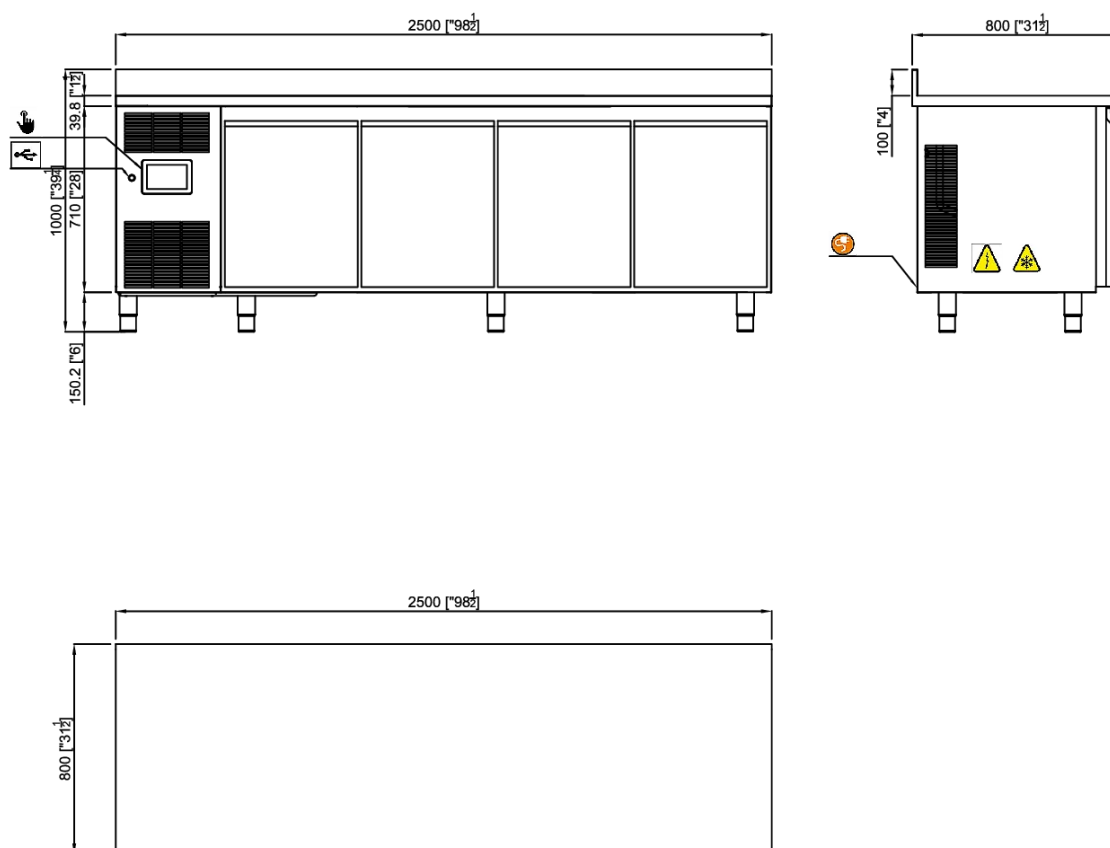

 Pannello comandi touch
Touch control

 Porta USB
USB port

 Cavo alimentazione elettrica
Power supply cable

 Impianto frigo
Refrigeration system

 Scatola elettrica
Electric box