TECNOMAC

our technology, your taste

BC7140BTS

220-240 V ~ 50 Hz

Refrigerated table for pastry and baking

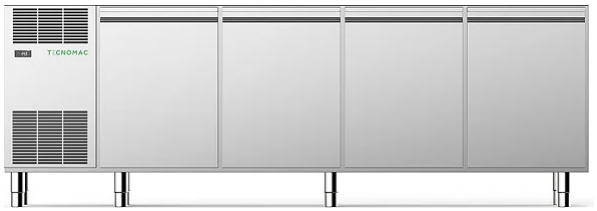

PERFORMANCE

TEMPERATURE RANGE	-18 °C / -22°C
CAPABILITIES	9 positions 57mm pitch for each door

CHECK

FEATURES

- AISI 304 stainless steel construction with scotch-brite exterior finish
- Monocoque structure
- External scotch-brite finish
- 60 mm high-density CFC- and HCFC-free PU insulation (42 kg/m3)
- Interior with rounded edges for easy cleaning
- Full-height ergonomic handle and magnetic seals
- Magnetic door gasket, replaceable without tools
- Available without top, with top, with top + countertop
- Height-adjustable stainless steel feet
- Indirect air circulation system, with flow conveyor, for perfect temperature uniformity
- Monobloc refrigeration unit
- Refrigerant gas R290
- Cataphoresis-treated evaporator with non-toxic epoxy resin
- Condensate water evaporation with hot gas system
- LCD display with capacitive touch controls

STANDARD EQUIPMENT

Without plan
1 pair of 'C' rails for each door
1 600x400 stainless steel grid per door

OPTIONAL EQUIPMENT

IOT cloud connection
Swivel casters (2 with brakes)
Lockable doors
Two drawers per compartment
Three drawers per compartment
Special voltages on request

The manufacturer reserves the right to change models and specifications without prior notice.

Via del Lavoro, 9 31033 Castelfranco Veneto (TV)
Tel. +39 0423.738452 email: info@castelmac.it www.tecnomac.eu

TECNOMAC
our technology, your taste

BC7140BTS
220-240 V ~ 50 Hz

DIMENSIONS	
Width	2440 mm [96.06 in]
Depth	750 mm [29.53 in]
Height	860 mm [33.86 in]
Weight	118 kg [260.19 lb]
Foot height	150 mm [5.91 in]
Door light width 1	360 mm [14.17 in]
Door light height 1	543 mm [21.38 in]
Door depth open 90°	1220 mm [48.03 in]
Inner depth	553 mm [21.77 in]
Packaging width	2600 mm [102.36 in]
Packing depth	900 mm [35.43 in]
Packaging height	1100 mm [43.31 in]
Packing weight	180 kg [396.9 lb]
Packing volume	2.57 m^3 [679.97 glus]

TECHNICAL DATA	
Temperature range	-18 °C / -22°C
Insulation thickness	60 mm [2.36in]
Number of rooms	4
Door type	Blind
Number of doors	4
Condensation type	Air
Plant type	Motor on board
Plant type	Ventilated
Compressor type	Hermetic
Refrigerant gas	R290
GWP refrigerant gas	3
Defrost type	Electric
Defrost water evaporation	Automatic
Interior lighting	Not present
Outdoor lighting	Not present
Climate class	5
Energy class	E

SECONDARY ELECTRICAL DATA	
Power plug	CE-Schuko

ELECTRICAL POWER SUPPLY VARIANTS		
	FLI - Full - Load Power	**FLA - Full - Load Amperage**
220-240 V ~ 50 Hz	890 W	5.2 A
208-230 V ~ 60 Hz	1068 W	6 A

The manufacturer reserves the right to change models and specifications without prior notice.

Via del Lavoro, 9 31033 Castelfranco Veneto (TV)
Tel. +39 0423.738452 email: info@castelmac.it www.tecnomac.eu

TECNOMAC
our technology, your taste

BC7140BTS
220-240 V ~ 50 Hz

DIMENSIONS

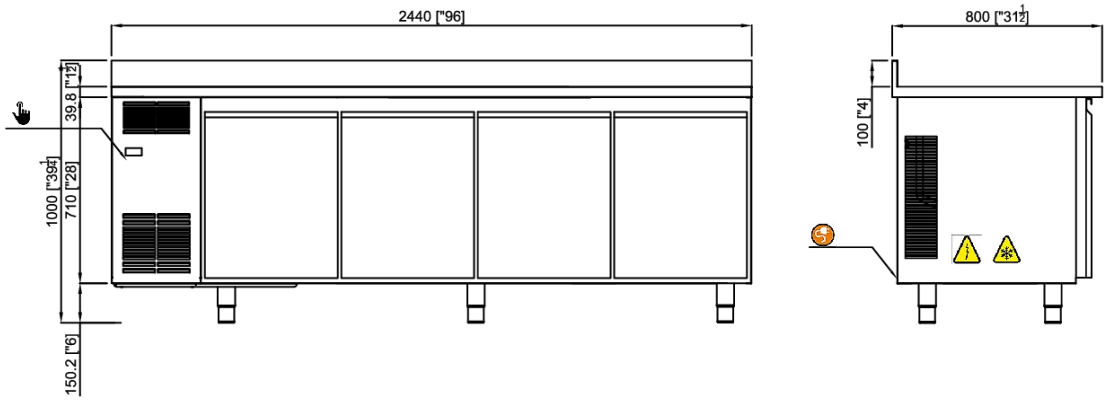

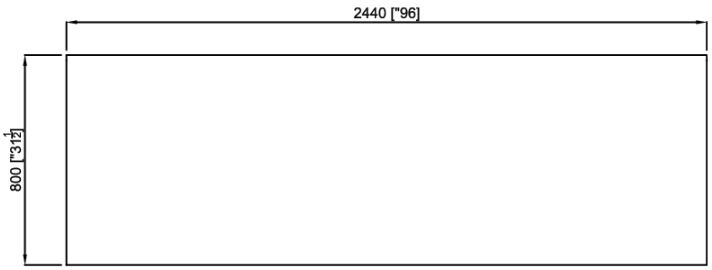

Display con tasti capacitivi
Display with capacitive keys

Cavo alimentazione elettrica
Power supply cable

Impianto frigo
Refrigeration system

Scatola elettrica
Electric box

The manufacturer reserves the right to change models and specifications without prior notice.

Via del Lavoro, 9 31033 Castelfranco Veneto (TV)
Tel. +39 0423.738452 email: info@castelmac.it www.tecnomac.eu