



PERFORMANCE

PRODUCT YIELDS +90°C/+3°C (*)	6 kg
PRODUCT YIELDS +90°C/-18°C (*)	4 kg
TEMPERATURE RANGE	-40°C / +5°C
CAPABILITIES	3 GN 2/3 pans
STEP GASTRONOMY GUIDES	70 mm
ICE CREAM TRAYS 165x360x120h mm	2
ICE CREAM TRAYS 250x360x120h mm	1

(*) Tests carried out according to the Castel MAC procedure, using beef cooked with a thickness of 5 cm.

CHECK



FEATURES

- Two basic working functions: blast chilling SOFT and HARD , deep-freezing SOFT and HARD
- Latest generation fans
- High-density polyurethane foam insulation (approx. 42 kg/m3), HCFC-free
- Heart probe
- Total chamber inspectability for maximum hygiene
- Air condensation
- Heart probe included
- Refrigerant fluid R290
- Copper-aluminum evaporator coil, cataphoresis painted with non-toxic epoxy resin
- Two-line graphical LCD display with capacitive touch controls

STANDARD EQUIPMENT

Fixed structure in AISI304 stainless steel that can be interlocked for GN 2/3

DIMENSIONS

Width	600 mm [23.62 in]
Depth	605 mm [23.82 in]
Height	400 mm [15.75 in]
Weight	45 kg [99.23 lb]
Foot height	10 mm [0.39 in]
Door light width 1	340 mm [13.39 in]
Door light height 1	270 mm [10.63 in]
Door depth open 90°	985 mm [38.78 in]
Inner depth	434 mm [17.09 in]
Packaging width	630 mm [24.8 in]
Packing depth	690 mm [27.17 in]
Packaging height	615 mm [24.21 in]
Packing weight	51 kg [112.45 lb]
Packing volume	0.26 m ³ [70.62 glus]

TECHNICAL DATA

Temperature range	-40°C / +5°C
Insulation thickness	40 mm [1.57 in]
Number of rooms	1
Door type	Blind
Number of doors	1
Condensation type	Air
Plant type	Motor on board
Plant type	Ventilated
Compressor type	Hermetic
Refrigerant gas	R290
GWP refrigerant gas	3
Refrigerant gas quantity g	105 g [6.56oz]
Cooling power EN12900 lbp	841 W [2867.81BTU/h]
Sound power	<70 dbA
Expansion valve type	Mechanics
Defrost type	Open door
Defrost water evaporation	Automatic
Interior lighting	Not present
Cooling power	841 W [2867.81BTU/h]
Climate class	5
Heat expelled	1500 W [5115BTU/h]
Air Volume	1 m ³ /h

CAPABILITIES

GN guides step	70 mm
----------------	-------

CAPABILITIES	
5Lt tanks 360x165x120h mm	2
5Lt tanks 360x250x80h mm	1

SECONDARY ELECTRICAL DATA	
Power cable	3G 1,5 mm ²
Power plug	CE-Schuko


ELECTRICAL POWER SUPPLY VARIANTS		
	FLI - Full - Load Power	FLA - Full - Load Amperage
220-240 V ~ 50 Hz	966 W	4.2 A

PERFORMANCE	
Blast chilling capacity (+65°C -> +10°C) EN ISO22042	10 kg [22.05lb]
Freezing capacity (+65°C -> -18°C) EN ISO22042	5 kg [11.03lb]
Energy consumption per blast cycle (+65°C -> +10°C) UNI EN ISO22042	0.213 kW/kg
Energy consumption per freezing cycle (+65°C -> +10°C) UNI EN ISO22042	0.407 kW/kg
Blast-down time (+65°C -> +10°C) UNI EN ISO22042	120 min
Freezing time (+65°C -> -18°C) UNI EN ISO22042	270 min


The manufacturer reserves the right to change models and specifications without prior notice.

DIMENSIONS



Vista Frontale
Frontal side

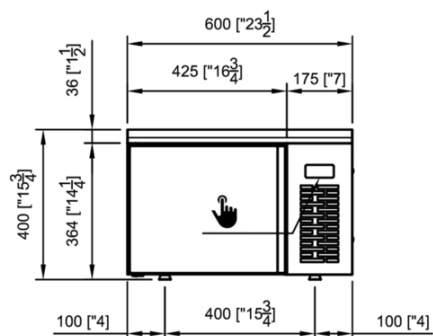

Vista Laterale
Lateral side

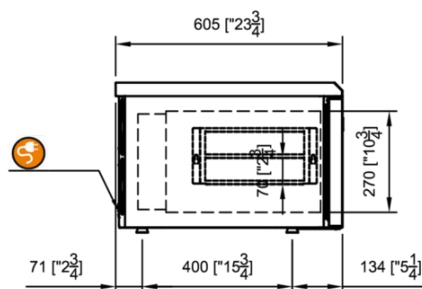

Vista Superiore
Top View

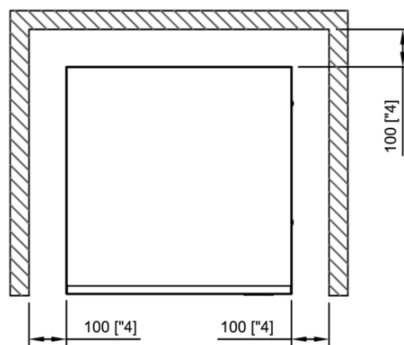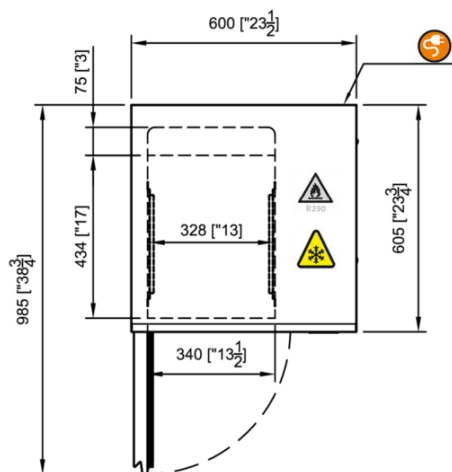

 Display con tasti capacitivi
Display with capacitive keys

 Cavo alimentazione elettrica
Power supply cable

 Impianto frigo
Refrigeration system

 Scatola elettrica
Electric box