



PERFORMANCE

TEMPERATURE
RANGE

-40°C / +5°C

CAPABILITIES

1 trolley 600x1000mm or GN2/1 or 2 trolleys
600x400mm

CHECK

13 SETTEMBRE 2024 - 09:48 AM			
+3° ❄️		-18° ❄️❄️❄️	
ABBATTIMENTO POSITIVO		ABBATTIMENTO NEGATIVO	
CICLO MANUALE			
+	👨‍🍳	⚙️	🔌

FEATURES

- AISI 304 stainless steel construction
- Conical core probe
- Floor and ramp included
- Hot gas defrosting
- Remote condensing unit
- 7" high definition touch display on the door
- 3 basic work functions: blast chilling, deep-freezing and storage
- USB port for cycle downloads, Firmware upgrades, recipe upload/download, etc.
- Storable recipes
- HACCP data reports and alarms

OPTIONAL EQUIPMENT

Ozone sanitisation
Water-cooled version
Version without condensation unit
Low noise condensing unit
Second heart probe
Additional tunnel door

DIMENSIONS	
Width	1580 mm [62.2 in]
Depth	1390 mm [54.72 in]
Height	2350 mm [92.52 in]
Door light width 1	930 mm [36.61 in]
Door light height 1	1980 mm [77.95 in]
Door depth open 90°	2348 mm [92.44 in]
Inner depth	1130 mm [44.49 in]
Packaging width	2500 mm [98.43 in]
Packing depth	1650 mm [64.96 in]
Packaging height	1440 mm [56.69 in]
Packing weight	580 kg [1278.9 lb]
Packing volume	5.94 m ³ [1569.17 glus]


TECHNICAL DATA	
Temperature range	-40°C / +5°C
Insulation thickness	70 mm [2.76in]
Number of rooms	1
Door type	Blind
Number of doors	1
Condensation type	Air
Plant type	Remote motor
Plant type	Ventilated
Compressor type	Semi-Hermetic
Refrigerant gas	R452A
GWP refrigerant gas	2141
Sound power	<70 dbA
Expansion valve type	Mechanics
Defrost type	Hot gas
Defrost water evaporation	Manual unloading
Interior lighting	Not present
Outdoor lighting	Not present
Remote unit cooling power	10970 W [37407.7BTU/h]
Climate class	5

SECONDARY ELECTRICAL DATA	
Power cable	5G 4,0 mm ²
Power plug	Plug not provided
Remote unit power supply	380-415 V 3N~ 50 Hz
Remote unit power plug	Plug not provided

PERFORMANCE	
Blast chilling capacity (+65°C -> +10°C) EN ISO22042	150 kg [330.75lb]
Freezing capacity (+65°C -> -18°C) EN ISO22042	135 kg [297.68lb]

The manufacturer reserves the right to change models and specifications without prior notice.

DIMENSIONS

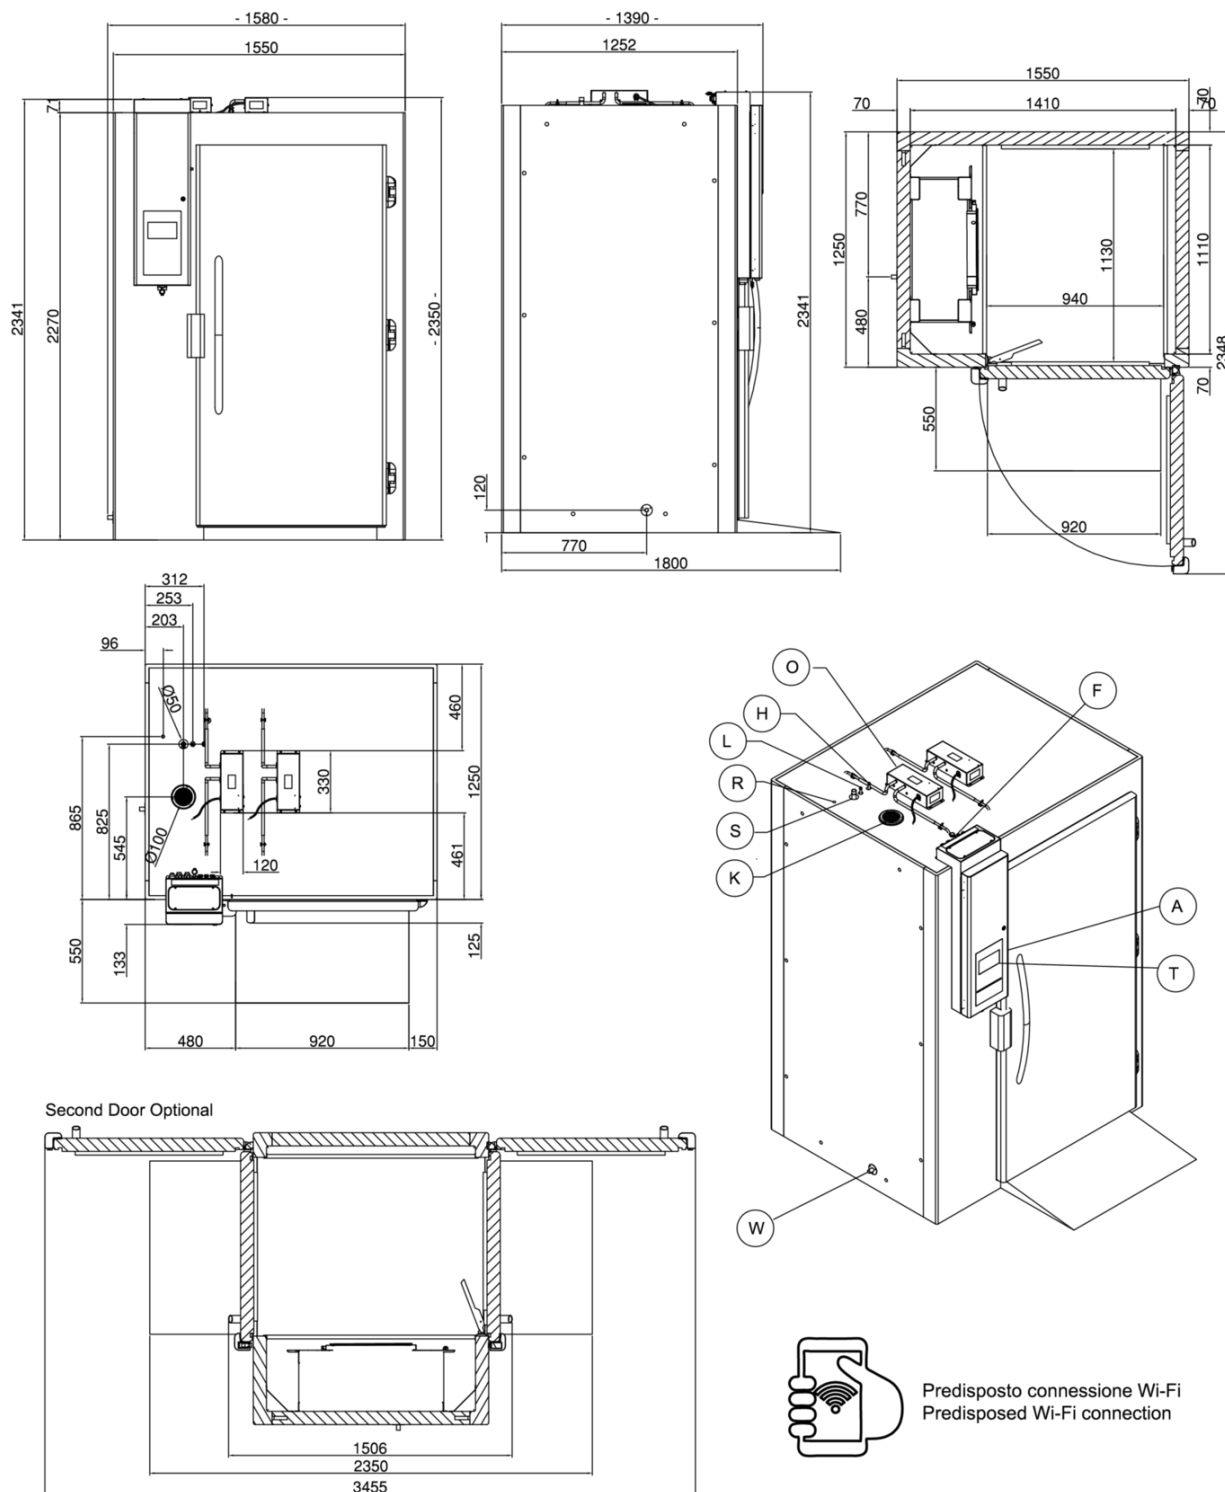

- | | | | |
|-------------------------|----------------------|-----------------------------------|------------------------|
| (O) Ozone Box | (H) Hot gas line | (W) Water discharge Ø 20 mm | (T) Touch comand panel |
| (K) Compensazione valve | (S) Suction gas line | (A) Electric Box with power cable | |
| (R) Cables outlet | (L) Liquid line | (F) WI-FI Connection | |



Predisposto connessione Wi-Fi
Predisposed Wi-Fi connection