



PERFORMANCE

TEMPERATURE RANGE	-40°C / +5°C
CAPABILITIES	2 trolleys 600x800mm or GN2/1

CHECK

13 SETTEMBRE 2024 - 09:48 AM			
+3° ❄️ ABBATTIMENTO POSITIVO		-18° ❄️❄️❄️ ABBATTIMENTO NEGATIVO	
 CICLO MANUALE			
+	👨🍳	⚙️	🔌

FEATURES

- AISI 304 stainless steel construction
- Conical core probe
- Floor and ramp included
- Hot gas defrosting
- Remote condensing unit
- 7" high definition touch display on the door
- 3 basic work functions: blast chilling, deep-freezing and storage
- USB port for cycle downloads, Firmware upgrades, recipe upload/download, etc.
- Storable recipes
- HACCP data reports and alarms

OPTIONAL EQUIPMENT

Ozone sanitisation
Water-cooled version
Version without condensation unit
Low noise condensing unit
Second heart probe
Additional tunnel door

DIMENSIONS

Width	1780 mm [70.08 in]
Depth	1790 mm [70.47 in]
Height	2410 mm [94.88 in]
Door light width 1	940 mm [37.01 in]
Door depth open 90°	2780 mm [109.45 in]
Inner depth	1480 mm [58.27 in]
Packaging width	2460 mm [96.85 in]
Packing depth	1750 mm [68.9 in]
Packaging height	1320 mm [51.97 in]
Packing weight	770 kg [1697.85 lb]
Packing volume	5.68 m ³ [1501.17 glus]

TECHNICAL DATA

Temperature range	-40°C / +5°C
Insulation thickness	100 mm [3.94in]
Number of rooms	1
Door type	Blind
Number of doors	1
Condensation type	Air
Plant type	Remote motor
Plant type	Ventilated
Compressor type	Semi-Hermetic
Refrigerant gas	R452A
GWP refrigerant gas	2141
Sound power	<70 dbA
Expansion valve type	Mechanics
Defrost type	Hot gas
Defrost water evaporation	Manual unloading
Interior lighting	Not present
Outdoor lighting	Not present
Remote unit cooling power	18880 W [64380.8BTU/h]
Climate class	5


SECONDARY ELECTRICAL DATA

Power cable	5G 10,0 mm ²
Power plug	Plug not provided
Remote unit power supply	380-415 V 3N~ 50 Hz
Remote unit power plug	Plug not provided

PERFORMANCE	
Blast chilling capacity (+65°C -> +10°C) EN ISO22042	270 kg [595.35lb]
Freezing capacity (+65°C -> -18°C) EN ISO22042	250 kg [551.25lb]

The manufacturer reserves the right to change models and specifications without prior notice.

DIMENSIONS

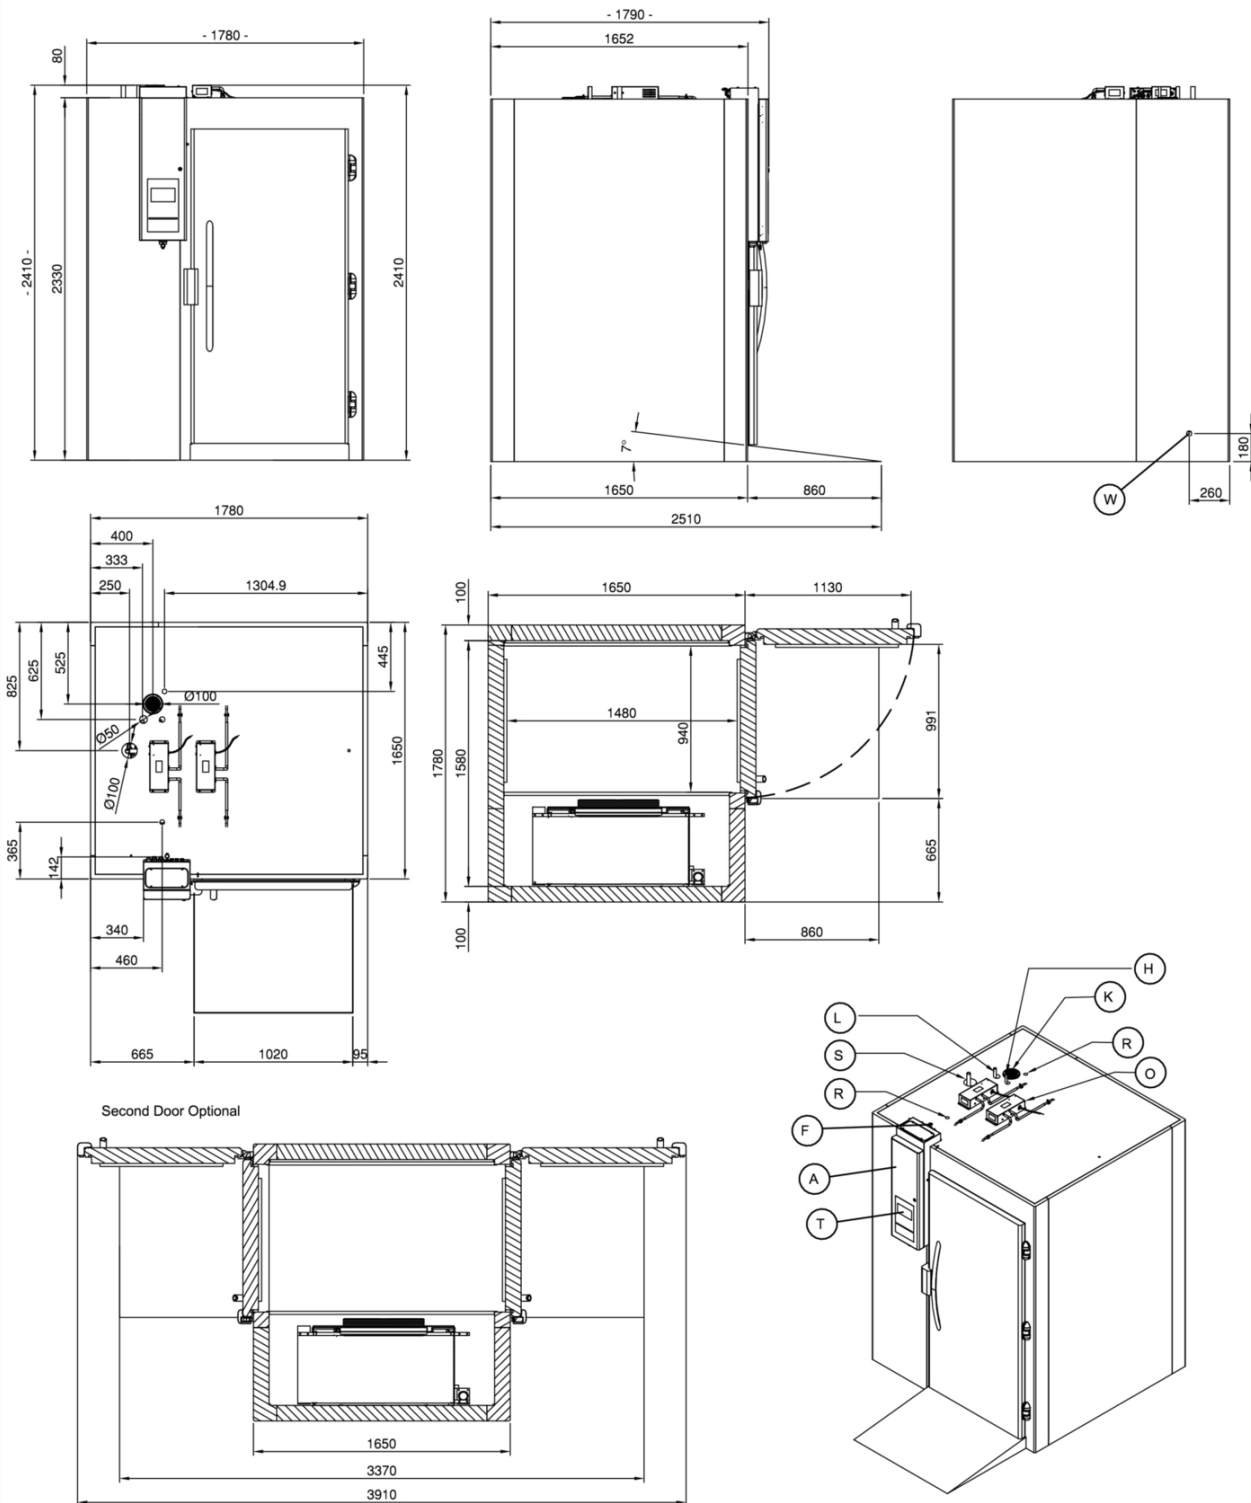

- | | | | |
|-------------------------|----------------------|-----------------------------------|------------------------|
| (O) Ozone Box | (H) Hot gas line | (W) Water discharge Ø 20 mm | (T) Touch comand panel |
| (K) Compensazione valve | (S) Suction gas line | (A) Electric Box with power cable | |
| (R) Cables outlet | (L) Liquid line | (F) WI-FI Connection | |



Predisposto connessione Wi-Fi
Predisposed Wi-Fi connection