



PERFORMANCE

TEMPERATURE RANGE	-10°C / +35°C
STEP GASTRONOMY GUIDES	10 mm

chilLINK

Simple and intuitive interface
Starting Plus commands remotely
Real-time alarm notifications
Remote control of parameters

CHECK



FEATURES

- High energy saving
- State-of-the-art electronic fans
- Insulation thickness 70 mm
- Possibility of airflow regulation
- Energy-efficient fans
- Electronically controlled proportional humidifier
- Easy-to-use, high-definition 7" full touch display
- Bi-directional 4.0 connectivity
- USB port for recipe downloads, firmware upgrades, recipe uploads/downloads, HACCP downloads.
- Ethernet connection
- Storable recipes
- Multilingual It-en-fr-es-de-dk-cz-fi

STANDARD EQUIPMENT

10 pairs "L" guides

DIMENSIONS

Width	730 mm [28.74 in]
Depth	856 mm [33.7 in]
Height	2000 mm [78.74 in]
Weight	148 kg [326.34 lb]
Foot height	130-180 mm [5.12-7.09 in]
castors height	155 mm [6.1 in]
Door light width 1	675 mm [26.57 in]
Door light height 1	1470 mm [57.87 in]
Packaging width	810 mm [31.89 in]
Packing depth	925 mm [36.42 in]
Packaging height	2275 mm [89.57 in]
Packing weight	169 kg [372.65 lb]
Packing volume	1.7 m ³ [450.29 glus]

TECHNICAL DATA

Temperature range	-10°C / +35°C
Insulation thickness	70 mm [2.76in]
Number of rooms	1
Door type	Blind
Number of doors	1
Condensation type	Air
Plant type	Motor on board
Plant type	Ventilated
Compressor type	Hermetic
Refrigerant gas	R290
GWP refrigerant gas	3
Refrigerant gas quantity g	120 g [7.50oz]
Sound power	< 70 dbA
Defrost type	Electric
Defrost water evaporation	Automatic

CAPABILITIES


GN guides step	10 mm
----------------	-------

SECONDARY ELECTRICAL DATA

Power resistive loads	600 W
Power cable	3G 1,5 mm ²
Power plug	CE-Schuko

DRAFT

DIMENSIONS

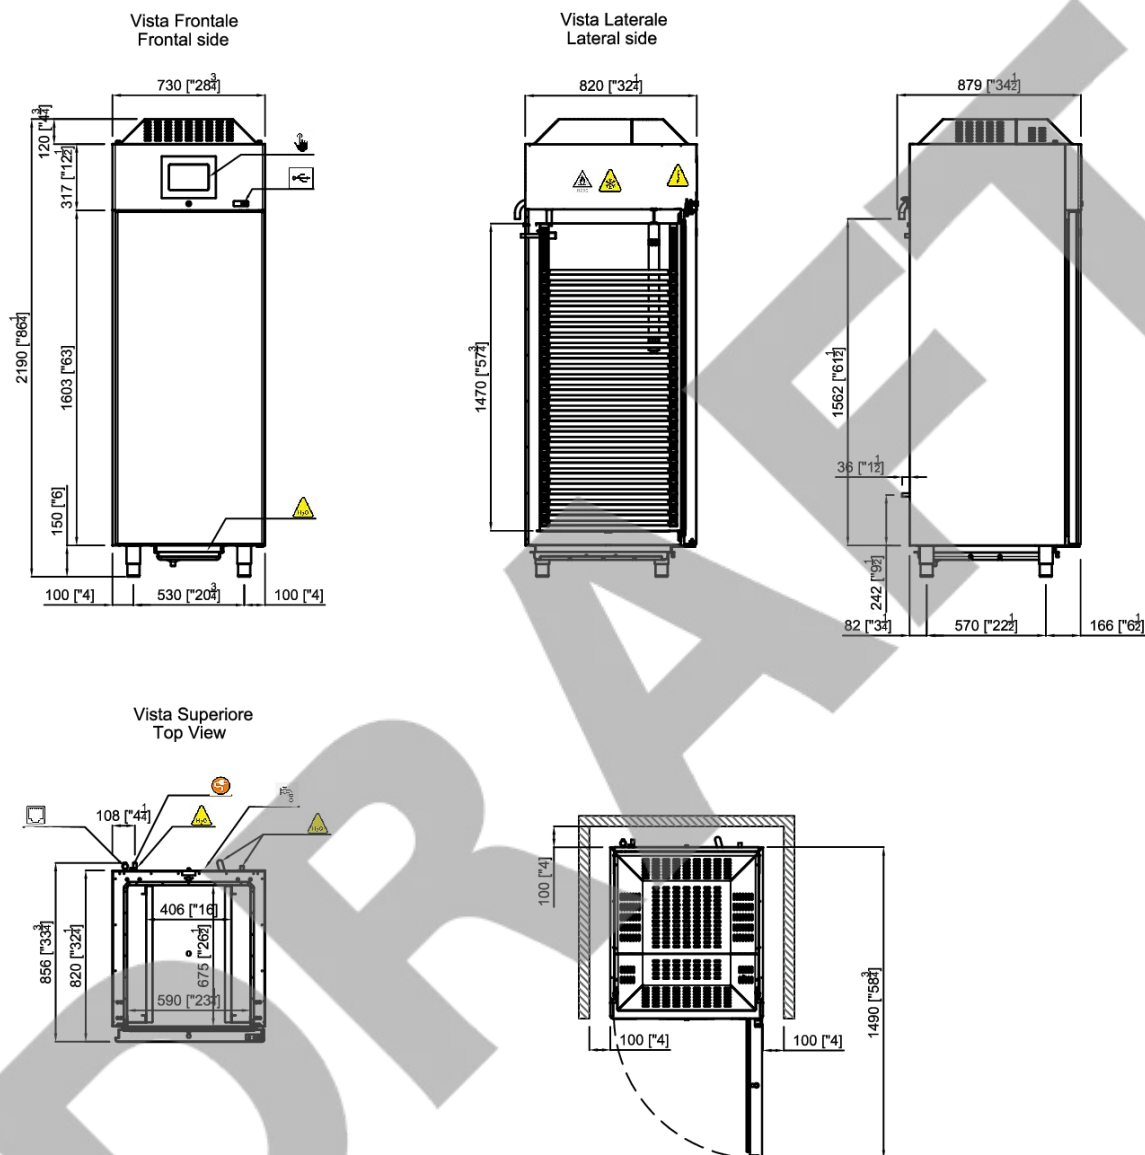

Pannello comandi touch
Touch control

Porta USB
USB port

Cavo ethernet
Ethernet cable

Tubo carico acqua
Loading pipe

Cavo alimentazione elettrica
Power supply cable

Impianto frigo
Refrigeration system

Scatola elettrica
Electric box

Tubo scarico acqua
Drain pipe